GALLAGHER™

2017 CATALOGUE

ELECTRIC FENCING

GALLAGHER

Horses	Game	Fish	12v 12 Volt	10 10-year warranty	*EconomyLine* EconomyLine
Cattle	Chickens	Birds	2 2-year warranty	Without metal core	**PowerLine** PowerLine
Sheep	Rabbits	6v 6 Volt	3 3-year warranty	With metal core	0 to 500 metres
Wild boar	Dogs	7,5v 7.5 Volt	5 5-year warranty	UV-resistant	**TurboLine** TurboLine
Goats	Cats	9v 9 Volt	7 7-year warranty	R.V.S. Stainless steel	Longer than 500 metres

Permanent fence	Adjustable voltage	Chargeable battery	External display	6V battery supply
Portable fencing	Battery life check	Alarm compatible	Includes remote control	9V battery supply
LCD display	Battery-saving options	SMS compatible	Includes fencing monitor	12V battery supply
Output voltage diagram	Energy-saving option	Solar-power supply / solar-power compatible	230V compatible	Includes 6V/12V battery

TABLE OF CONTENTS

WE'RE GOOD LISTENERS

On the back of years of experience and by listening to you, Gallagher understands your needs and wishes. Gallagher always responds by creating a new solutions that make farming life even more efficient. Furthermore, you always receive the best possible service and installation advice from a Gallagher specialist.

A SOLUTION FOR EVERY CHALLENGE

Our founder Bill Gallagher senior had a farm, so he was no stranger to the challenges you face. He wanted to make 'farming life' easier and during the 1930s he developed the first electric fencing. Now, 76 years later, Gallagher is still making a farmer's life a little easier.

YOU CAN GO THE HARD WAY...
OR THE GALLAGHER WAY

Brilliant solutions that make your business more profitable or even easier to manage - that's where Gallagher would like to help.

FARM-PROOF

Before we offer our products they are tested comprehensively. The products are put to extreme tests, but that gives Gallagher the certainty that they are of the highest quality. The energizer in the picture still works after all the tests.

NEW PRODUCTS & SPECIAL OFFERS

ESPECIALLY FOR YOU

NEW

NEW POWERHOUSE MB1000

- 10 Joule, the strongest Multi Power energizer in the market!
- Fencing of up to 30 km
- Burns away vegetation, adaptive control®
- Optimum performance with solar panels!

B80, B180, AND B280 NOW WITH FREE ADAPTER

FREE ADAPTER

028443	B80 Multi Power	= 1
028450	B180 Multi Power	= 1
028467	B280 Multi Power	= 1

301303	MB1000 Multi Power	= 1

NEW SOLAR RANGE

The entire Solar range has been developed especially for a farm environment - every energizer is quick and easy to install, has fall-resistant and water-proof housing and with this revamped, intelligent battery management it works 3 weeks without any sunlight.

EASY TO OPERATE
POWERFUL AND STRONG
EFFICIENT IN USE
INCLUDES BATTERY

UNIQUE IN THE MARKET!

341323	S20	= 1
345307	S40	= 1

346304	S100	= 1

GALLAGHER

B35 + FREE BATTERY
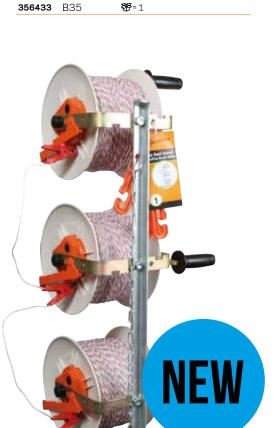
Powerful and reliable with a built-in alarm that indicates when the battery is nearly empty, extremely easy to use, easy to move, with carry handle, 0.35 Joule, for fencing of up to 1,5 KM.

NOW WITH A FREE 55 AH BATTERY

FREE BATTERY

M500 + DVM

Strong and reliable, maintenance-free, easy to use, 5.2 Joule, for fencing of up to 23 KM.

FREE FENCE VOLTMETER FOR MEASURING THE VOLTAGE ON THE FENCING

356433	B35	= 1

FREE DVM

037137	M500	= 1

NEW

REEL POST PRE-FITTED

The product for temporary fencing or strip grazing. Suitable for all animals.

LARGE GEARED REEL

NEW

633046	3 Geared reel and TurboLine rope	= 1

016313	Large geared reel 1200m	= 1

NEW

NOW ALSO AVAILABLE: BLUE WIRE IN 400 METRES

NEW 400M

075829	400m	= 1
072477	1000m	= 1

FREE REMOTE

M2800i + REMOTE CONTROL

Extremely powerful energizer with 21 Joule of stored energy, suitable for fencing of up to 53km.

FREE REMOTE CONTROL TO SWITCH THE ENERGIZER ON/OFF ALL ALONG THE FENCING.

306315	M2800i	= 1

WHICH GALLAGHER ENERGIZER DO YOU NEED?

If you need to electrify fencing, Gallagher is the place for you! Will you opt for one of our intelligent energizers from the i Series? A battery solution? Maybe a solar energizer is better suited to your situation. Whatever your needs , we can offer the most reliable solution.

MAINS ENERGIZERS

Our mains energizers are ideal for permanent fencing. These energizers do not need a battery and work on 230V.

There are different types of mains energizers for different types of fencing. Gallagher has the most suitable energizer for every type of fencing.

BATTERY ENERGIZERS

There may be fencing that cannot be connected to the mains and a battery energizer is a better choice in those situations. These energizers only need a battery and no mains. A number of energizers have a battery-saving option to lengthen the lifespan of the battery significantly.

SOLAR DEVICES

An energizer that works on solar power is the best choice for remote areas! The battery is charged by sunlight and converts it into electricity. The energizers will continue to run for 3 weeks without any sunlight, do not require maintenance, are environmentally friendly and reliable.

With the new Gallagher Solar range it is even possible to run fencing of up to 10 km on solar power! Absolutely unique in the market! Gallagher through and through!

> **USE THE ENERGIZERS CALCULATOR ON WWW. GALLAGHER.EU TO CALCULATE WHICH ENERGIZER IS BEST SUITED TO YOUR SITUATION.**

THE POWER OF THE i SERIES

POWER · SERVICE · CONTROL

i SERIES:

Powerful, intelligent and technically perfect energizers.

With their power, intelligence and technical perfection, the energizers in the i Series are the best in the world! Furthermore, you always receive the best possible service and installation advice from a Gallagher specialist.

ULTIMATE POWER

- Adaptive Control® provides a continuous voltage on the fencing, any time anywhere, with the lowest possible electricity consumption
- Burns away vegetation
- Maximum power, even at the end of the fencing

ULTIMATE POWER · POWER ALWAYS AND EVERYWHERE · BURNS OFF VEGETATION · THE MOST POWERFUL SHOCK

ABSOLUTE CONTROL · ALWAYS INFORMATION · ALERTS DIRECTLY AND ANYWHERE · EASY TO OPERATE

ABSOLUTE CONTROL

- Extremely practical and easy to operate
- Be warned immediately and anywhere
- Always aware of the state of the fencing with the Energizer Controller®

OPTIMUM SERVICE

- Product and installation advice from the Gallagher specialist
- Global presence with more than 6,000 points of sale in Europe

OPTIMUM SERVICE · SUPPORT BY THE GALLAGHER SPECIALIST · GLOBAL PRESENCE · 2-YEAR WARRANTY

> **FOR MORE INFORMATION ABOUT THE i SERIES, PLEASE VISIT WWW.GALLAGHER.EU**

M2800i

The M2800i is an extremely powerful energizer with 21 Joule stored energy, suitable for fences up to 53km. Unique external display enables you to operate and monitor the energizer from a convenient location (up to *50m optional), *3m cable is included. Expandable with remote control and maximal 6 additional fence monitors.

SPECIAL OFFER — FREE REMOTE WORTH

INCLUDED   SOLD SEPARATELY

> For more information about the accessories, please visit page 14

| 306315 | M2800i | = 1 |
| 306308 | M2800i incl. accessories | = 1 |

The external display enables you to read out information about your fencing from a distance and to operate the energizer.

The energizer adapts to the fencing conditions in order to minimise the energy consumption.

M1800i

The M1800i is a very powerful energizer with 14 Joule stored energy, suitable for fences up to 43km. The external display communicates with the fence. The system is expandable with maximal 6 fence monitors and remote control.

| 304304 | M1800i | = 1 |

M1200i

The M1200i is a powerful energizer with 11 Joule stored energy, suitable for fences up to 32km. The external display communicates with the fence and shows the status of the energizer, the fence and the earth.

| 303307 | M1200i | = 1 |

SPECIFICATIONS i SERIES

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Options
M2800i 306315	7000	6400	5400	21	14	53	21	11	120	
M1800i 304304	7000	7000	5200	14	10	43	17	9	75	
M1200i 303307	8100	8100	3800	11	6,6	32	13	6	48	

i SERIES ACCESSORIES

- Energizer controller: Shows all your fence performance information in one convenient separate display box that can be placed up to 50m away from the energizer itself.
- Remote controller: to turn the fence on/off anywhere along the fence line. Integrated fault finder functions lead you to the problem in the fence. 'Inquire' function shows energizer display on the Remote Controller from anywhere on the fence. Compatible with M1800i and M2800i only.
- SMS controller: warns you via a text message when the fence voltage gets below a preset alarm level. In addition, the controller sends updates to your mobile phone.
- Alarm controller: to connect a flashlight and / or siren as an alarm.
- Siren/flashlight: these alarm accessories can be connected (single or multiple) to your mains energizers. They will warn you in case there is a problem with your fence.
- Inverter 12V/230V permanent solar: enables you to power all energizers from a 12V source. Ideal for solar projects where i Series technology is required.
- Inverter 12V/230V battery backup: to connect a 12V battery to the I-series as a back-up. If the mains power is lost this device will switch to battery power and take over, so you will always have a safe electric fence.
- SMS remote controller: to switch all mains energizers on and off by calling or texting with your mobile phone. So if you detect a fence failure, you can instantly repair your fence without getting a shock.

what is included?

Item						M1000	M1200i	M1800i	M2800i incl. accessories	M2800i excl. accessories
								i SERIES		
303376		Energizer controller	🎁 = 1			O	▪	▪	▪	▪
507002		Remote controller	🎁 = 1			X	X	O	▪	O
510002		Fence monitor	🎁 = 1			X	X	O	▪	O
579009		I-Series Alarm System	🎁 = 1		**	O	O	O	O	O
567600		SMS controller I-series	🎁 = 1			O	O	O	O	O
005215		Siren	🎁 = 1		**	O*	O*	O*	O*	O*
005208		Flashlight	🎁 = 1		**	O*	O*	O*	O*	O*
069392		Inverter 12V/230V	🎁 = 1		**	O	O	O	O	O
069408		Inverter 12V/230V	🎁 = 1		**	O	O	O	O	O
005205		SMS Remote control	🎁 = 1		**	O	O	O	O	O

* Only together with 579009
** Also compatible with other 230V energizers

▪ Included   0 Optional   X Not possible

WOULD YOU LIKE TO KNOW HOW THE SYSTEM WORKS? VISIT WWW.GALLAGHER.EU/i-SERIES FOR MORE INFORMATION OR SCAN THE QR CODE TO VIEW THE VIDEO.

M1000

Simplicity, that's our M1000. A very powerful energizer with 10 Joule stored energy, which secures voltage at the end of your fence! Suitable for fences up to 28km. Compatible with all I-series accessories apart from the remote and fence monitor.

303314	M1000	⚘ = 1

M700

Strongest conventional, low impedance, high voltage energizer with 6.5 Joules stored energy. Supplied with the latest digital technology providing trouble free usage for years. Suitable for long multiwire fences up to 26 km.

031930	M700	⚘ = 1

SPECIAL OFFER

FREE DVM

M500

Strong conventional, low impedance, high voltage energizer with 5.2 Joules stored energy. Supplied with the latest digital technology providing trouble free usage for years. Suitable for long multiwire fences up to 23 km.

037137	M500	⚘ = 1

M300

Strong conventional, low impedance, high voltage energizer with 3.2 Joules stored energy. Supplied with the latest digital technology providing trouble free usage for years. Suitable for multiwire fences up to 17 km.

380339	M300	⚘ = 1

M200

Entry level energizer of the range, supplied with the latest digital technology providing trouble free usage for years. High voltage energizer with 1,9 Joules stored energy. Suitable for shorter multiwire fences up to 10 km.

032830	M200	⚘ = 1

SPECIFICATIONS 230V ENERGIZERS

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Options
M1000 303314	8100	7800	3600	10	6	28	12	5,5	40	
M700 031930	7200	4400	3000	6,5	4,6	26	11	5	35	
M500 037137	9300	6200	2600	5,2	4	23	9	5	24	
M300 380339	8400	4800	1700	3,2	2,2	17	7	3	12	
M200 032830	7300	4200	1600	1,9	1	10	4	2	7	

M160

Easy to operate mains energizer for shorter runs of fencing up to 9 km. Very easy to install. With integrated lightning protection.

| 384306 | M160 | = 1 |

M120

Easy to operate mains equipment for shorter runs of fencing up to 8 km. Very easy to install using the wall clip supplied. With integrated lightning protection.

| 033333 | M120 | = 1 |

M50

Easy to operate mains equipment for short runs of fencing, especially suitable for domestic pets. Very easy to install using the wall clip supplied. With integrated lightning protection.

| 038332 | M50 | = 1 |

SPECIFICATIONS 230V ENERGIZERS

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)
M160 384306	7700	4600	1600	1,6	0,6	9	3,5	2,5	6
M120 033333	7000	3800	1300	1,4	0,5	8	3	2	4
M50 038332	7000	3300	1100	0,6	0,3	4	2	1	2

MULTI POWER
Switches between 12V-230V / solar energy

MULTI POWER

When it comes to flexibility, the Multi-Power energizers are the ideal choice for electric fencing. You can either just use the battery or to combine it with a solar panel to charge the battery. MultiPower energizers can also be connected to the mains by means of the optional mains adapter 12 V/230 V.

NEW POWERHOUSE MB1000

THE STRONGEST ENERGIZER IN THE MARKET!

10 Joule; The strongest energizer in the market!

Fencing of up to 30 km

Burns away vegetation adaptive control®

Works best with solar panels!

MB1000 Multi Power

The MB1000 is our Multi Power energizer for fences of up to 30 km. This energizer is the strongest time-delayed battery energizer with a battery. Includes a handle for easy fitting. It is also possible to connect a solar panel (230V/12V grid adapter available separately: item no 053865)

NEW

301303	MB1000 Multi Power	= 1

IMPORTANT! Before you connect the mains adapter to your MultiPower energizer, you need to disconnect the battery first! Never connect to the mains when the battery is also connected!

ADAPTER TYPE 1

Connect the cable as shown

ADAPTER TYPE 2

Cable set

230V adapter

Connection

B280 Multi Power

Powerful Multi Power 12V battery energizer for fencing up to 20 km. Suitable for all kinds of animals. With integrated battery-saving options. Easy to operate by turning a switch. 5 settings: OFF - battery monitor - full power - random - night mode. LEDs for monitoring battery and output voltage: green is OK. Includes handle for carrying and mounting.Solar power option. Mains Power Supply adapter (partnr.053865) separately available.

SPECIAL OFFER FREE ADAPTER

| 028467 | B280 Multi Power | = 1 |

B280 + Solarbox

Specially designed to make the B280 portable. This packages deal includes the B280 and an easy to carry energizer box with solar bracket. Optional solar panels can be easily mounted to this powerfull combination. The B280 is a Multi Power 12V battery energizer for fencing up to 20 km.

| 073542 | B280 + Solarbox | = 1 |

B180 Multi Power

Powerful Multi Power 12V battery energizer for fencing up to 13 km. Suitable for all kinds of animals. With integral battery-saving options. Easy to operate by turning a switch. 5 settings: OFF - battery monitor - full power - random - night mode. LEDs for monitoring battery and output voltage: green is OK. Includes handle for carrying and mounting. Solar power option. Mains Power Supply adapter (partnr.053865) separately available.

SPECIAL OFFER FREE ADAPTER

| 028450 | B180 Multi Power | = 1 |

B180 + Solarbox

Specially designed to make the B180 portable. This packages deal includes the B180 and an easy to carry energizer box with solar bracket. Optional solar panels can be easily mounted to this powerfull combination. The B180 is a Multi Power 12V battery energizer for fencing up to 13 km.

| 073535 | B180 + Solarbox | = 1 |

B80 Multi Power

Powerful Multi Power 12V battery energizer for fencing up to 7 km. Suitable for all kinds of animals. Easy to operate by turning a switch. 3 settings: off, full power and battery charge level check. LEDs for monitoring battery and output voltage: green is OK. Includes handle for carrying and mounting. Solar power option. Mains Power Supply adapter (partnr.053865) separately available.

B80 + Solarbox

Specially designed to make the B80 portable. This packages deal includes the B80 and an easy to carry energizer box with solar bracket. Optional solar panels can be easily mounted to this powerfull combination. The B80 is a Multi Power 12V battery energizer for fencing up to 7 km.

SPECIAL OFFER — **FREE ADAPTER**

028443	B80 Multi Power	= 1

073528	B80 + Solarbox	= 1

SPECIFICATIONS MULTI POWER

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Recommended battery (minimum)	Power consumption at 12V(mA)	Power consumption in saving mode (mA)	Suitable for solar panel (minimum)	Main features	Supply internal/ external
MB1000 301303	8000	8000	3800	10	7	30	15	11	40	Optima YT R3,7L	560	360	30W		
B280 028467	8000	4500	1500	2,8	1,5	20	8	4	15	Optima YT R3,7L	240	98	30W		
B180 028450	7900	4400	1500	1,8	1,1	13	5	3	10	Optima YT S2,7L	170	70	20W		
B80 028443	7500	3800	1200	0,8	0,6	7	3	1	4	Optima YT S2,7L	80	-	10W		

GALLAGHER

B300

Powerful battery energizer suitable for 9 and 12V use. Suitable for fencing up to 20km. Highly visible low battery and fence voltage indicator lights. Four easy to use Battery Save Options which can extend battery life by up to 12 months. Advised battery: Gallagher 12V 85 Ah (not included). Ideal in combination with solar energy.

394008	B300	= 1
068609	Kit 6W (B100,B200,B300)	= 1

B200

Powerful battery energizer suitable for 12V use. Suitable for fencing up to 13km. Highly visible low battery and fence voltage indicator lights. Four easy to use Battery Save Options which can extend battery life by up to 12 months. Advised battery: Gallagher 12V 85 Ah (not included). Ideal in combination with solar energy.

393001	B200	= 1
068586	B200 + 6W solar assist	= 1
068609	Kit 6W (B100,B200,B300)	= 1

B100

Powerful battery energizer suitable for 9V and 12V battery use. Energizer for fencing up to 7km. Highly visible low battery and fence voltage indicator lights. Four easy to use Battery Save Options which can extend battery life by up to 12 months. Ideal in combination with solar energy.

392004	B100	= 1
068609	Kit 6W (B100,B200,B300)	= 1

B60

Entry level 12V battery powered energizer capable of powering up to 6km or 3 hectare of Multi-wire fence. Providing an effective electric shock on the fence from a small and easy to mount Energizer the B60 is designed for customers who require simplicity.

350301	B60	= 1

SPECIFICATIONS 12V ENERGIZERS

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Recommended battery (minimum)	Power consumption at 12V(mA)	Power consumption in saving mode (mA)	Suitable for solar panel (minimum)	Main features	Supply internal/external
B300 394008	10000	5800	1600	2,6	2	20	8	4	15	Optima YT R3,7L	200	71	30W		
B200 393001	9000	4300	1400	1,45	1,1	13	5	3	10	Optima YT S2,7L	120	40	20W		
B100 392004	10000	3500	1100	0,8	0,55	7	3	1	4	Optima YT S2,7L	60	35	10W		
B60 350301	8000	5500	800	0,7	0,48	6	2	0,5	3	Optima YT S2,7L	45	-	10W		

B50

Powerful device supplied by a 9 V disposable or 12 V storage battery. The LED shows red if battry voltage is low. 3 settings: full power, night mode and random. Battery savings options on 9 V battery (not 12V). Comes with connection for solar panel. Includes earth stake.

028931	B50	= 1

B40

The world's most energy efficient battery energizer! Only 9mA use in night safe mode. This means secure animal safety and ultra low battery consumption. Earth stake included.

386317	B40	= 1
068579	B40 + 4W solar assist	= 1

B35

The B35 is a 9V Battery powered Energizer capable of powering up to 4 km or 1.5 hectare of Multi-wire fence. Providing a portable Energizer solution that is light and easy to move.

SPECIAL OFFER **FREE BATTERY**

356433	B35	= 1
7608	Stander B20/B35	= 1

B20

Feature-packed battery-operated device, powers fences up to 2km (without vegetation). Very easy to use. It operates on a 9V disposable battery or a 12V rechargeable battery. The device warns you when the battery is almost flat.
On sale, was £145.00 now £129.00!

028818	B20	= 1
7608	Stander B20/B35	= 1

B11

Robust Battery-unit on self-supporting stand with carry handle for simple installation. Features 4 Battery Save Options that can be selected using the external switch. Built-in indicator light flashes with each pulse. 12V battery leads and 6x1,5V batteryset included.

013534	B11 incl. 6x1.5V batteries	= 1

B10

Robust Battery-unit, has a built-in indicator light that flashes with each pulse. Ideal for strip grazing & protecting gardens from small animals. Operates by 6 x 1,5V Alkaline batteries D-cell LR20 (not included), also suitable for 12 Volt lead/acid battery, 12V adapter kit available (004747).

003634	B10	= 1

GALLAGHER

SPECIFICATIONS 9V ENERGIZERS

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Recommended power supply	Power consumption at 9V(mA)	Power consumption saving mode (mA)	Main features	Supply internal/external
B50 028931	8200	2900	1000	0,5	0,3	4	2	2	9V-160Ah	50	24		
B40 386317	7900	2100	500	0,4	0,27	4	2	2	9V-120Ah	40	9		
B35 356433	8300	1800	700	0,35	0,27	4	1,5	1,5	9V-55Ah	33	-		
B20 028818	9200	1800	800	0,20	0,15	2	1	1	9V-55Ah	25	-		
B11 013534	8200	1500	500	0,11	0,09	1	-	0,5	6X1,5V	20	-		
B10 003634	7900	1200	400	0,1	0,07	1	-	0,5	6X1,5V	15	-		

WHICH BATTERY FITS THE FOLLOWING PORTABLE ENERGIZERS:

		Battery							Solar				
		B20 028818	B35 356433	B40 386317	B50 028931	B100 392004	B200 393001	B300 394008	S10 341309	S16 341216	S20 341323	S40 345307	S100 346304
6Volt	075188 - 4Ah								▪	▪	▪		
	200590 - 7Ah												
	000459 - 10Ah											▪	
9Volt	007578 - 55Ah	▪	▪	▪	▪								
	008704 - 120Ah	▪	▪	▪	▪								
	008711 - 160Ah	▪	▪	▪	▪	▪ (2x)							
	048588 - 175Ah	▪	▪	▪	▪	▪ (2x)							
	063451 - 210Ah	▪	▪	▪	▪	▪ (2x)							
12Volt	047024 - 5Ah												
	000442 - 7Ah												▪
	047031 - 12Ah												
	033553 - 25Ah	▪	▪	▪	▪								
	033515 - 65Ah					▪	▪	▪					
	004171 - 85Ah					▪	▪	▪					
	033409 - 105Ah												
12Volt Optima	059621 - S2,7L					▪	▪	▪					
	059614 - R3,7L					▪	▪	▪					
	062096 - S5,5L												

SOLAR

Are you looking for an energizer that provides free energy and is environmentally friendly too? Go for solar! The Gallagher solar range consists of energizers with an integrated solar panel. We also have individual solar panels and batteries that can be used with 9V/12V energizers.

NEW

S100 incl. battery

With the S100 it is easy to place fencing of up to 10 km without you having to charge the battery. This powerful energizer works on solar power, is quick to install and easy to transport. No more hassle with empty batteries, with the S100 you still have power, even after 3 weeks without sunshine!

EASY TO OPERATE
POWERFUL AND STRONG
EFFICIENT IN USE
INCLUDES BATTERY

346304	S100 incl. battery	= 1

S40 incl. battery

The S40 is the ultimate energizer for fencing of up to 5 km. The energizer is quick to install and easy to transport. The energizer will work for 3 weeks without sunlight and has a built-in lightning conductor. This makes the S40 an excellent alternative to a battery-operated system.

NEW

345307	S40 incl. battery	= 1

 GALLAGHER

S20 Inc.battery and solar mount

Do you regularly move your animals to a different pasture? Your fencing is less than 2 km long? The S20 is your ideal choice. This energizers works on solar power and is environmentally friendly and maintenance free. It is also easy to move and fall-resistant.

| 341323 | S20 incl. battery | = 1 |
| 075188 | 6V 4Ah Battery S10, S16, S20 | = 1 |

NEW

S16 incl. battery

The S16 is the ultimate portable Energizer solution, storing 0.1 J and capable of powering up to 1 mile/1,5km or 0.5 hectare of Multi-wire fence. The Energizer comes complete with a rechargeable battery and solar panel. The S16 is quick and easy to install and convenient to transport. This robust and highly portable unit makes a great alternative to battery-powered systems.

SPECIAL OFFER **FREE BRACKET**

| 341316 | S16 incl. battery | = 1 |
| 075188 | 6V 4Ah Battery S10, S16, S20 | = 1 |

S10 incl. battery

The S10 is the latest solar energizer suitable for the hobby market and short fences <1 km>. The energizer is quick and easy to istall an will work for up to 3 weeks without sun and is capable to power trough the harshest winsters. The S10 is super tough making it drop resistant and waterproof. The Energizer comes complete with a rechargeable battery and solar panel.

SPECIAL OFFER **FREE BRACKET**

| 341309 | S10 incl. battery | = 1 |
| 075188 | 6V 4Ah Battery S10, S16, S20 | = 1 |

Mount Solar post S10, S16, S20

Install the S10, S16 or S20 energizer on a Gallagher Ring Top Post using the Post Mount.

| 571102 | Mount Solar post S10, S16, S20 | = 1 |

Stand for S10, S20, S17 and S22

Spare base, for S10, S20, S17 and S22 solar energizer.

| 007509 | Stand for S10, S20, S17 and S22 | = 1 |
| 200590 | 6V 7Ah Battery S17, S22 | = 1 |

SPECIFICATIONS SOLAR ENERGIZERS

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Recommended battery (minimum)	Power consumption (V/ mA)	Built-in solar panel (Watt)	Main features	Supply internal/ external
S100 346304	9600	3600	1600	1,0	0,74	10	5	3	10	12V-7Ah	12/43	7W		
S40 345307	7900	2300	800	0,40	0,26	5	3	1,5	5	6V-10Ah	6/46	4W		
S20 341323	7900	2100	500	0,20	0,14	2,5	1	0,5	1,2	6V-4Ah	6/29	1,5W		
S16 341316	7000	2000	500	0,16	0,12	1,5	0,5		0,8	6V-4Ah	6/17	1,5W		
S10 341309	7000	1600	500	0,10	0,08	1	0,3		0,5	6V-4Ah	6/14	1,5W		

S230

The ultimate solar combination: the trusted B200 with 1.45 Joules stored energy (for fences up to 13km), powered by an Optima Yellow top, that is charged by a 30W solar panel. For a reliable and maintenance free operation for many years.

| 060870 | S230 (B200+30W+Optima 3,7l) | = 1 |

S220

The ultimate solar combination: the trusted B200 with 1.45 Joules stored energy (for fences up to 13km), powered by an 2,7L Optima Yellow top, that is charged by a 20W solar panel. For a reliable and maintenance free operation for many years.

| 061556 | S220 (B200+20W+Optima 2,7l) | = 1 |

S280

Is your fencing longer than 13 km but shorter than 20 km? The S280 is the solution you're looking for. This special offer consists of a B280 Multi Power energizer, a carry box with brackets , a 30 Watt solar panel and an Optima 3.7L battery.

NEW

| 075843 | S280 | = 1 |

S180

Add the S180 and you have the complete package. This special offer consists of a B180 Multi Power energizer, a carry box with brackets , a 20 Watt solar panel and an Optima 2.7L battery. This gives you a complete solution for fencing of up to 13 km.

NEW

| 075836 | S180 | = 1 |

Solar assist kit

Solar assist kits 4W & 6W fits within a minute, 4W with the B40 & B50 energizers and the 6W with the B100, B200 & B300 energizers. It doesn't charge the battery but doubles battery life.

| 068593 | Kit 4W (B40/B50) | = 1 |
| 068609 | Kit 6W (B100,B200,B300) | = 1 |
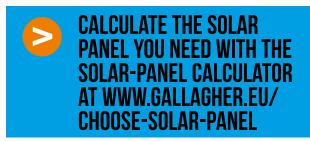
SPECIFICATIONS SOLAR KITS
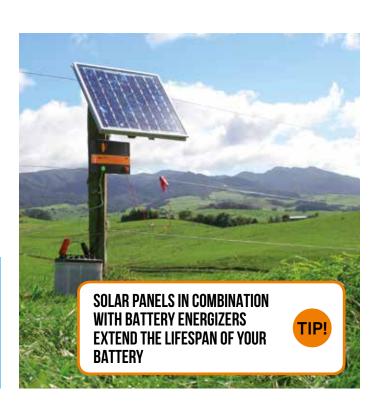
	Energizer (included)	Battery (included)	Solar panel / Watt (included)	Bracket for solar panel	Carry box / Solar carry box
S280 075843	B280	Optima YT R3,7L	30W	Integrated	Included
S230 060870	B200	Optima YT R3,7L	30W	Included	Integrated
S220 061556	B200	Optima YT S2,7L	20W	Included	Integrated
S180 075836	B180	Optima YT S2,7L	20W	Integrated	Included

GALLAGHER

SOLAR PANELS

- Gallagher provides top-quality, tested solar panels with a 2-year warranty on all modules.
- Solar power is environmentally friendly and an increasingly popular economical energy provider.
- All solar panels have a controller that protects the battery against overcharging.
- The range is completed with galvanised brackets, bolts and clamps.
- All solar panels have polycrystalline cells for maximum energy yield.
- Solar panels can be used with mains energizers if you use a converter (item no 069392).

> **CALCULATE THE SOLAR PANEL YOU NEED WITH THE SOLAR-PANEL CALCULATOR AT WWW.GALLAGHER.EU/ CHOOSE-SOLAR-PANEL**

SOLAR PANELS IN COMBINATION WITH BATTERY ENERGIZERS EXTEND THE LIFESPAN OF YOUR BATTERY TIP!

Solar panel

12v 2

Polycrystalline high-performance solar module with optimised low-light and temperature features. Shock-resistant and hardened solar glass with self-cleaning surface and sturdy aluminium frame. Complete with power cable. Very easy fitting. More than 20 year service life.

041701	10 Watt incl. 2A regulator	= 1
041732	20 Watt incl. 2A regulator	= 1
041725	30 Watt Incl. 10A regulator	= 1
027897	50 Watt incl. 10A regulator	= 1
041718	60 Watt incl. 10A regulator	= 1

Solarbracket B100/B200/B300 V2.0

12v

Bracket for mounting a 10W, 20W or 30W GE Solarpanel to a B100, B200 or B300 Energizer.

NEW

068709	Bracket for 10W/20W/30W GE Panel	= 1
069774	Solar bracket 10/20/30W Panel	= 1
069781	Solar bracket 50/60W Panel	= 1

Regulator

12v

Part.nr. 068838 2A regulator for 10W and 20W Solarpanel.
Part.nr. 068845 10A regulator for 30W, 50W and 60W Solarpanel.

068838	2A for 10W/20W Panel	= 1
068845	10A for 30W/50W/60W Panel	= 1

SPECIFICATIONS SOLAR PANELS

	Length x width x height (mm)	Weight (kg)	Nominal peak power (Wp)	Voltage at nominal power (Vmp)	Current at nominal power (Imp)	Voltage at open circuit (Voc)	Short-circuit current (Isc)	Operating temperature	Maximum system voltage (DC)	Solar cell	Suitable for	Min. recommended 12V battery / Ah	High-efficiency crystalline cells	Aluminium frame	Bracket for post, wall, theft-proof cabinet assembly. (not included)	Bracket for fitting on battery box B100, B200, B300 (not included)	Controller	Battery connection cable (m) included	Includes crocodile clip
10 Watt 041701	340 x 280 x 17	1,1	10Watt	17.3	0.59A	21.6	0.65A	-40C tot +85C	1000V	Poly-crystalline	B20, B35, B40, B50, B100	25/65	▪	▪	069774	068709	2Amp	2	▪
20 Watt 041732	340 x 450 x 25	1,8	20Watt	17.5	1.15A	22.0	1.27A	-40C tot +85C	1000V	Poly-crystalline	B60, B80, BX50, B100, B200	65/85	▪	▪	069774	068709	2Amp	2	▪
30 Watt 041725	340 x 635 x 25	2,5	30Watt	17.5	1.72A	22.0	1.90A	-40C tot +85C	1000V	Poly-crystalline	B180, B200, B300	85	▪	▪	069774	068709		3	▪
50 Watt 027897	660 x 530 x 35	4,2	50Watt	17.5	2.86A	22.0	3.17A	-40C tot +85C	1000V	Poly-crystalline	B280	105	▪	▪	069781			3	▪
60 Watt 041718	660 x 630 x 35	5,0	60Watt	17.5	3.43A	22.0	3.80A	-40C tot +85C	1000V	Poly-crystalline	B280	105	▪	▪	069781			3	▪

GALLAGHER

WHICH TYPE OF FENCING SUITS YOUR ANIMAL

The type of electric fencing that is best for you depends on your situation. Which animals do you keep? Are you looking for permanent or portable fencing? Would you like installation convenience or do you prefer minimal maintenance? All these questions determine your choice. Gallagher has a solution for every situation. We will be pleased to advise you!

FENCING SOLUTIONS

Permanent

Gallagher has permanent fencing available for every type of animal. For example, High Tensile is ideal for cattle or game and lasts up to 25 years. For horses, Gallagher recommends EquiFence. EquiFence is the most durable fencing for horses and is extremely safe because of the protective plastic cable.

Gallagher has the complete range of permanent fencing - from durable insultimber posts, top-quality conductors to robust insulators.

Semi-permanent

At times you may wish to put up fencing for a longer period of time without it being permanent, when you lease pasture for example. In those situations Gallagher provides the solution with semi-permanent fencing.

Portable fencing

If you move the animals several times a year, we recommend portable fencing. Gallagher has a solution for every situation. For example, the SmartFence 2.0 is the ideal solution for sheep and goats.

10-YEAR SYSTEM WARRANTY

If you use materials recommended by Gallagher: Ecoposts, Insultimber posts, ElectroMax fencing wire, Equifence, reinforced S corner insulators, fixing wires, tension springs, rotating tensioners, Gallagher provides a 10-year system warranty.
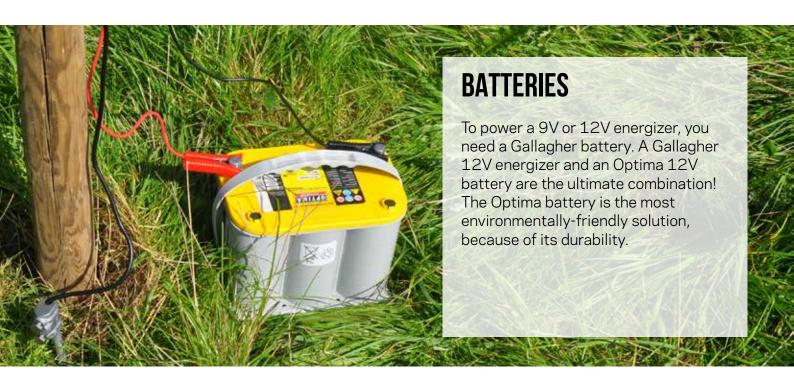
> **USE THE FENCING CALCULATOR TO DISCOVER THE TYPE OF FENCING THAT IS BEST SUITED TO YOUR SITUATION. WWW.GALLAGHER.EU/ COMPOSE-ELECTRIC-FENCE**

COMPLETE RANGE

After you have chosen the most suitable energizer, it is important to choose the correct parts. This Chapter contains an overview of all the other Gallagher products. Every single one of these products is guaranteed top quality!

BATTERIES

To power a 9V or 12V energizer, you need a Gallagher battery. A Gallagher 12V energizer and an Optima 12V battery are the ultimate combination! The Optima battery is the most environmentally-friendly solution, because of its durability.

Powerpack battery 9 volt

9v

Environmentally friendly alkaline 9 Volt battery for use with 9V battery powered energizers. Alkaline Batteries give you up to 30% better performance than Air Oxygen batteries. Suitable for all Gallagher 9Volt energizers

007578	55Ah (160x110x115mm)	= 1
008704	120Ah (160x110x115mm)	= 1
008711	160Ah (190x125x160mm)	= 1
048588	175Ah (190x125x160mm)	= 1
063451	210Ah (190x125x160mm)	= 1

Battery

12v

The 12V/25Ah rechargeable battery is a closed gel rechargeable battery, whilst the other models are lead/acid rechargeable batteries. They are particularly suitable for supplying rechargeable battery and battery energizers. Regular charging extends the lifespan of the rechargeable battery.

Battery charger CTEK (12V)

12v **5**

Most batteries loose charge during winter time. Prevent this by connecting your battery to this maintenance charger. Your battery will remain charged! Essential for your battery during winter time. This charger is capable to charge all batteries up to 105Ah.

033553

033515

033553	25Ah (166x175x125mm)	= 1
033515	65Ah (242x175x190mm)	= 1
004171	85Ah (278x175x190mm)	= 1
033409	105Ah (353x175x190mm)	= 1

056707	XS 0.8 EU (12V)	= 1
567299	XC0.8 (6V)	= 1

Round battery

6v

Environmentally friendly alkaline 6 Volt battery 90 Ah for use with battery powered energizers.

055661	6V/90Ah	= 1
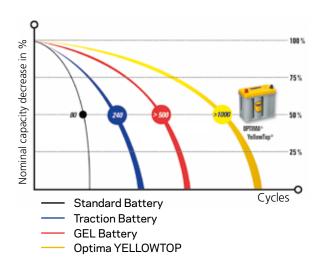
THE BENEFITS OF OPTIMA 12V BATTERIES

THE OPTIMA BATTERY ENERGIZER IS THE MOST ECONOMICAL AND MOST ENVIRONMENTALLY-FRIENDLY SOLUTION, BECAUSE OF ITS DURABILITY.

- Ideal for seasonal use.
- Guaranteed the best purchase.
- Very good charge acceptance.
- Smaller than traditional battery energizers, easy to carry.
- Ideal for winter storage because of its very low self-discharge.
- Cost savings, as it lasts more than twice as long.
- It combines ideally with solar panels, because of its minimal internal resistance.

Nominal capacity decrease in %

- —— Standard Battery
- —— Traction Battery
- —— GEL Battery
- —— Optima YELLOWTOP

	059621 S2,7l	059614 R3,7L	062096 S5,5L
Length in mm	228	229	317
Total length in mm	237	237	325
Height without posts in mm	201	168	218
Height with posts in mm	227	197	238
Width in mm	121	172	158
Total width in mm	129	172	165
Nominal voltage (V)	12	12	12
Cold start power (EN)	460	660	975
Capacity in Ah (EN)	38	48	76
Reserve capacity (BCI) in Min	66	98	155
Weight in KG	11,8	16,6	26,5

CHARGE YOUR BATTERY REGULARLY DURING THE WINTER MONTHS!

TIP!

Optima Yellowtop S2,7L

12v

Uncompromising Quality! This Optima S2,7L 12V battery can be compared with a regular 65Ah 12V battery, but is smaller in size, lighter in weight and has a longer life. Ideal for use with solar modules. Extremely fast recharge with all common, regulated chargers.
Volume 2,7 litres, dimensions L237xH227xW129mm.

059621	Optima S2,7L	= 1
059614	Optima R3,7L	= 1
062096	Optima S5,5L	= 1

EARTHING

Earthing ensures that the current can flow back to the energizer as soon as an animal touches the fence. No earthing means no current on the fencing, which is essential to good fencing!

Bentonite super earthing mix

Earthing can be achieved simply and quickly with this mix, even in extremely dry conditions. The mixture of salt and absorbent clay retains moisture and increases the conductivity of the surrounding soil. To be used in poor earthing conditions and in combination with more powerful energizers. Excl. earth stake.

008773	Bentonite	= 1

Lead out cable ø2,7mm XL

XL wire coated with a heavy duty double insulation. Good quality polyethylene for abrasion resistance in the ground. 2,7mm high tensile aluminium coated wire three times the conductivity of 2,5mm galvanized wire. Ideal for carrying power long distances underground. For use between earth stakes.

016276	ø2.7mm XL - 200m	= 1

Lead out cable

Double insulated lead-out cable to connect the energizer with the fence and to make underground connections (e.g. gateways). Use this cable for short distances. For distances over 30m use 2.5mm cable.

065028	ø1.6mm - 10m - 100 Ohm/1km	= 1
066097	ø1.6mm - 25m - 100 Ohm/1km	= 1
021604	ø1.6mm - 50m - 100 Ohm/1km	= 1
065011	ø2.5mm - 25m - 35 Ohm/1km	= 1
062712	ø2.5mm - 50m - 35 Ohm/1km	= 1
021611	ø2.5mm - 100m - 35 Ohm/1km	= 1
162713	ø2.5mm - 400m - 35 Ohm/1km	= 1

Earth stake

Without a proper Earth System your energizer will not perform . Always use galvanised earth stakes. Battery Energizers: Earth Stake length 1m c/w clamp.

029037	2m with earth clamp	= 3
029020	1m with earth clamp	= 3
008735	Earth stake 1m (excl. earth clamp)	= 1
044030	Earth clamp	= 1

Earthing accessories
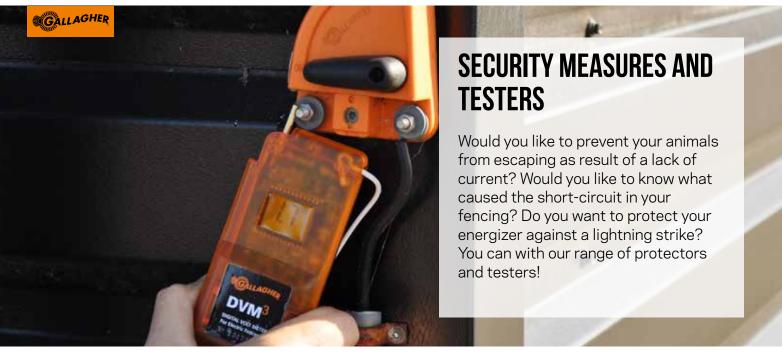
Earth clamp: guarantees a good connection between the earth stakes and lead-out cable from the energizer. Lead out joint kit: for a secure, waterproof connection of lead out cable without power loss.

044030	Earth clamp	= 1
063796	Lead-out connector	= 2
044023	Earth socket	= 1

GALLAGHER

SECURITY MEASURES AND TESTERS

Would you like to prevent your animals from escaping as result of a lack of current? Would you like to know what caused the short-circuit in your fencing? Do you want to protect your energizer against a lightning strike? You can with our range of protectors and testers!

Cut out switch

By using a switch, you can divide your fence into several sections and switch them on and off independently of each other. This will also help you trace any faults that occur.

060705	Cut out switch	= 1

Knife Cut-Off Switch

This switch helps you to switch off a part of the fencing for maintenance, for use for passages and gates or when you are looking for faults. The switch also offers the option to divide the fence into different plots. It can also be used to switch the fence on or off on the spot.
The switch is made of stainless steel, visible from a distance, and is supplied with fitting screws.

Lightning diverter

The only adjustable lightning diverter on the market, suitable for every energizer. Protects the energizer against damage through lightning by diverting the lightning from the fence to ground (earth). The lightning diverter needs to be mounted between the fence and the energizer. Can withstand multiple lightning strikes.

NEW

064802	Lightning diverter	= 1

000770	Knife Cut-Off Switch	= 1

Flood gate controller

Device especially for ditches that can be mounted on a fence. It stops the current flowing through the bottom line if the water (or another resistance) reaches the bottom wire. The rest of the wires will keep its voltage. Has a resistance of 5600 Ohm.

1506	Flood gate controller	= 1

Security kit

The Security Kit protects your Maxi master from possible theft. The kit is very easy to install and can be used with all B100, B200, B300, S220 and S230 models.

057002	Security Kit	= 1

Vandal proof box

A galvanised box that protects battery and fence units. To deter vandals, the box is connected to the energizer and can be locked with a padlock (not included). Fits max.350x160x240mm sized Energizers and max.360x260x230mm sized Battery. Dimensions incl.foot, 395x295x500mm. Suitable to place on Insultimber post 10x10cm, (not included, partnr. 017904). Ideal for B60/B80/B180/B280 and others.

| 019410 | Vandal Proof Box | = 1 |

Battery energizer box

Portable box for electrical equipment and batteries. Maximum size of the battery 34 cm deep x 23 cm wide. Suitable for B60/B80/B180/B280. Other energizers will fit with little changes.

| 025237 | Battery energizer box | = 1 |

Lead set

				9V			12V/230V			Solar			
			B10	B20 B35	B40 B50	B60	B80 B180 B280 MB1000	B100 B200 B300	S10 S16 S20 S40 S100	S17 S22	S20 S50	S220 S230
004938		Cable set to connect the energizer to the fencing and the earthing.	= 1		•		•			•	•		
201276		Cable set to connect the energizer to the fencing and the earthing.	= 1			•		•	•			•	•
005499		Cable set to connect a 9 Volt energizer to a 12 Volt battery.	= 1		•								
001015		Replacement cable set to connect the B60 to a 12V battery.	= 1				•						
004747		Cable adapter to connect a B10 to a 12 Volt battery.	=	•									
201283		Cable set to connect an energizer to a battery.	= 1			•			•				•
053865		230V/12V adapter to connect MultiPower energizers to 230V.	= 1		•**	•*		•	•*				

* In combination with cable set 201283
** In combination with cable set 005499

Crocodile clip Black

🅑 🅒 ⑩

Crocodile clip Black

400174	Black	= 5
400204	Red	= 5
400211	Green	= 5

Warning sign

Warning signs must be attached to any electric fence every 50 metres wherever the fence borders a public right of way.

| 075881 | EU Warning sign (Universal) | = 1 |

GALLAGHER

Live fence indicator
(2)

The Live fence indicator is fitted to the fence and flashes with each pulse of the energizer so you can see whether the fencing is still working correctly.

511009	Live fence indicator	= 1

Neontester
(2)

A convenient tool for checking whether there is sufficient voltage at the electric fence. Not suitable for checking earth systems.
Range: Led 1, 1,0kV > 1,8kV, Led 2, 1,9kV > 2,5kV, Led 3, 2,6kV > 3,8kV, Led 4, 3,9kV > 4,8kV, Led 5, 4,9kV >

015019	Neontester	= 1

Fault Finder
(2)

Pinpoints faults quickly and easily whatever type of wire or energizer is used. By simultaneously measuring the current flow and voltage, the Fault Finder will follow the current flow to any one of a series of faults.

509051	Fault Finder	= 1
202068	Battery Fault Finder	= 1

Fence Volt Meter
(2)

Supplies exact information on the condition of your fence. Makes targeted trouble shooting very easy. Auto ON/OFF. Helpful tool for checking earthing system. Powered by one 9V battery (a life of 6-12 months). Displays fence voltage from 100V up to 12kV.

015033	Fence Voltmeter	= 1

GUARDING YOUR ANIMALS

The SMS Fence Alarm is a unique plug and play security system for your fence. In comparison with the existing systems, this product is a true breakthrough. It warns you with a text message if there is insufficient voltage (e.g. due to vegetation) or when the fencing is interrupted (e.g. when a gate is opened). You can divide your fence into 2 zones for accurate problem detection. It works for a whole season on 3 standard batteries (not included).

SMS fence alarm
A B C D E (2)

The SMS fence alarm is a unique plug & play security for your fence. Compared with the existing devices this product is in another league. The SMS Fence alarm warns you via SMS if the voltage is too low.

055654	SMS fence alarm	= 1

WHY SHOULD I INSTALL A SMS FENCE ALARM?
- Theft (*).
- Certainty that there is sufficient voltage at the end of the fencing.
- Works independently. Does not have to be connected to the energizer's battery (100% self-sufficiency).
- An immediate alert in the event of theft of the energizer.

(*) As it is vulnerable to theft, it is recommended to install the Fence Alarm separate from the energizer

POSTS

Gallagher has two types of posts - posts for temporary fencing and posts for permanent fencing. The permanent posts - Gallagher post, Ecopost and Insultimber post - differ from each other in terms of quality, sustainability and price. We also have portable posts in various types and sizes, including plastic posts, fibre-glass posts and metal posts. Each type has its own application.

Insultimber (FSC®)

Self-insulated Timber (FSC®) for permanent fencing. Up to 70% more cost effective than traditional non-electric fencing. No insulators required. Insultimber (FSC®) does not require chemical treatment.

FSC
www.fsc.org
FSC® C019604

The mark of responsible forestry

017898	Strainer Post 8.0x8.0cm - 2.00m	= 1
017997	Strut 4.0x8.0cm - 2.00m	= 1
007847	Post 5.0x5.0cm - 2.10m	= 1
007724	Post 3.8x3.8cm - 1.80m	= 1
007601	Post 3.8x3.8cm - 1.50m	= 1
007854	Dropper 3.8x2.6cm - 1.56m	= 1
007733	Dropper 3.8x2.6cm - 1.26m	= 1
019403	Dropper 3.8x2.6cm - 1.10m	= 1
007618	Dropper 3.8x2.6cm - 0.95m	= 1

Eco post
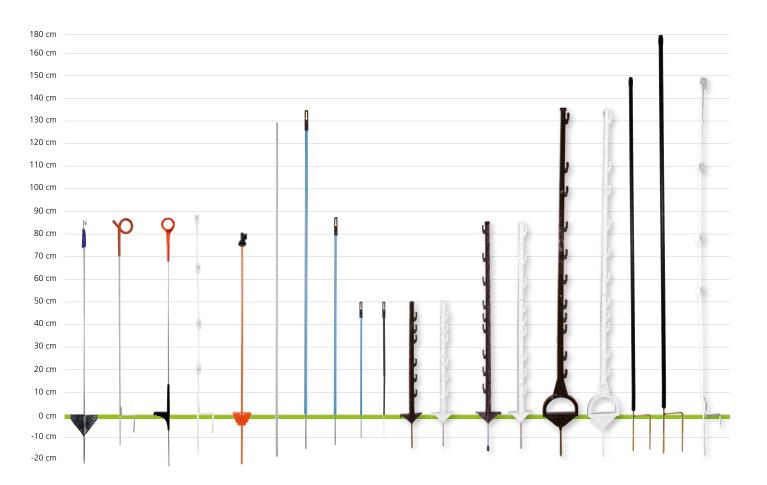
Plastic Eco Post, made from 100% single source, recycled material (polypropylene). The material together with the cross-shaped section (Ø 70mm), guarantees the strength of the post. No insulators needed. Up to 70% more cost effective than traditional (non-electric) fencing.

009527	1.50m	= 4
009534	1.85m	= 4

A PORTABLE POST FOR ANY SITUATION!

LIGHT AND EASY TO MOVE

Gallagher also has portable posts in various types and sizes, including plastic posts, fibreglass posts and metal posts. They are all light-weight and easy to move. For example, we have plastic posts with wire holders so you do not need any loose insulators. The tread-in post has been developed specifically for portable horse fencing. You can take 50 of these smoothly finished posts in one hand when you fence off your pasture. You already know the spring steel post with pigtail insulator.

Ring Top post

The most popular option for dairy and beef cattle, practical design for stronger posts, no tangling and better grip in the ground.

723136	Ring Top post - 1.00m	= 10

Pigtail post

Plastic coated spring steel post with UV stabilised plastic insulated orange pigtail insulator. If several wires are to be used, add screw-on insulator part no. 010950/010943. Maximum fence height: 0.85m.

642134	Orange Pigtail Post - 1.00m	= 10
010943	Screw-on rod White ø6-16mm	= 10
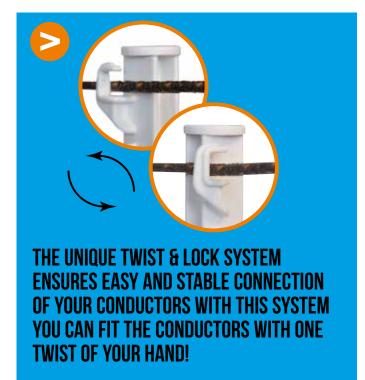
Vario post / Heavy duty tread in post

Very sturdy and durable plastic post 1.00m high with 9 numbered lugs designed for virtually all kinds of animals. Suitable for all sorts of (poly)wire and tape up to 20mm. The unique twist 'n lock system guarantees a simple and secure attachment of the conductors with a maximum wire height of 0.85m.

| 028481 | Vario post white - 1.00m | = 10 |
| 071043 | Vario Post terra - 1.00m | = 10 |

THE UNIQUE TWIST & LOCK SYSTEM ENSURES EASY AND STABLE CONNECTION OF YOUR CONDUCTORS WITH THIS SYSTEM YOU CAN FIT THE CONDUCTORS WITH ONE TWIST OF YOUR HAND!

Horse post

Unique and durable post, 1.55m high, which is ideal for semi-permanent horse fencing. Easy to tread by using the convenient stirrup foot. The unique twist 'n lock system guarantees a simple and secure attachment of the conductors up to 1.35m high.

| 019328 | White - 1.55m | = 5 |
| 060771 | Terra - 1.55m | = 5 |

Sheep post / Hobby post

Very sturdy and durable post, 0.75m high, with 6 numbered lugs and extra strong footing. Suitable for tape up to 20mm, rope and polywire. The unique twist 'n lock system guarantees a simple and secure attachment of the conductors with a maximum wire height of 50cm.

| 057849 | Sheep post white - 0.75m | = 10 |
| 021468 | Hobby post terra - 0.75m | = 10 |

Steel pigtail post

Strong mild-steel post with blue top-insulator and large welded on foot for easy tread-in installation. Use part 004218 or 010950 if you use more wires. Maximum fence height: 0.88m.

019250	Spring steel oval post 1.10m	= 10
008155	Top insulator for 019250	= 5
004218	Screw-on tape insulator	= 10
010950	Screw-on rod Black ø4-10mm	= 20

Spring steel post

Sturdy steel post. If several wires are to be used, add insulator # 010752. Maximum fence height: 0.80m.

008902	Orange - 1.00m	= 1
019274	Orange - 1.00m	= 50
009411	Top insulator for 019274/008902	= 5
010752	Insulator for 008902/019274	= 10

GALLAGHER

PVC plastic post

Very practical and simple grazing post. Unique top insulator which is resistant to damage if you knock the post into the ground with a hammer.

024391	Blue - 0,50m + 0,20m spike	= 10
024407	Black - 0,50m + 0,20m spike	= 10
024414	Blue - 0,85m + 0,20m spike	= 10
024421	Blue - 1,35m + 0,20m spike	= 10
2211	Top insulator for PVC plastic post	= 1
003266	Clips for PVC post 13mm	= 10
004218	Screw-on tape insulator	= 10

Deer post plastic

Simple solid post for mobile fences to 1.50 m (# 063475) or 1.80 m (# 063482). Wire clips # 063499 to assemble at any desired height. Top insulator is removable so clips can easily be confirmed.

063475	Black - 1.70m	= 10
063482	Black - 2.00m	= 10
063499	Clips for PVC post 19mm	= 25

Tumble wheel (5)

One person can move a whole fence within a matter of minutes using the tumble wheels. The strip grazing system reduces the grazing cycles and increases the yield. Ask your dealer for more information. Maximum fence height: 0.78m.

056388	Tumble wheel (5)	= 5

Quattro post

Very sturdy, lightweight spring steel post with 4 removable insulators. Maximum fence height 87.5cm. The 10cm double pointed foot makes it easy to install. White insulated coating for maximum visibility and to avoid shorting problems.

064253	White - 1.00m	= 10
067513	Insulator for 064253	= 10

Fibre glass post

Fibreglass post 10mm for semi-permanent fences. Ideal in combination with polywire or 1,6mm High Tensile wire.

008172	Post ø10mm - 1.50m	= 1
008158	Post ø10mm - 1.25m	= 50
018300	Clip fibreglass post ø10mm	= 25

Garden post / Pond Post

Compact, curved plastic post for mobile fences for deterring herons. Ideal for use near a pond. With curve as extra protection against animals leaning over and overhanging plants. For use in combination with plastic wire. Easy to fit. Maximum fence height: 51cm. Product warranty: 2 years.

065035	Garden post	= 5

CONDUCTING WIRES

The conducting wire in electric fencing is of crucial importance, because it transports the current. Even though all conducting wires would appear to be the same, there is a big difference in terms of price and quality. There are also differences in use. The Gallagher range consists of tape, cord, plastic wire, Equifence and High Tensile. Each of them with their different conductivity, durability and design. Make sure you choose the right conducting wire for your use!

EQUIFENCE

This is the most durable and safe Gallagher fencing for horses. EquiFence consists of an elastic plastic cable with a galvanised core. The 3mm thick plastic casing protects the horse against the zinc-aluminium core. The plastic casing has been made conductive by means of three carbon lines. Fitting a Gallagher EquiFence fencing requires experience, so please contact your Gallagher specialist.

Black carbon lines produce the conductive properties of EquiFence.

Core 2.5 mm aluminium-coated wire.

UV-resistant.
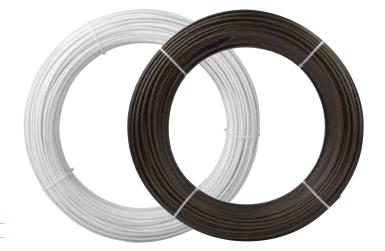
Equifence

The safest solution for your horse. Unique electrically conductive polymer (in black stripes) allows use as electric fence wire. Provides you, in combination with tension springs, ultimate safety for your horse. Total diameter of 7.5mm with a core of 2.5mm high tensile wire.

009124	White - 250m	= 1
053858	Terra - 250m	= 1

GALLAGHER
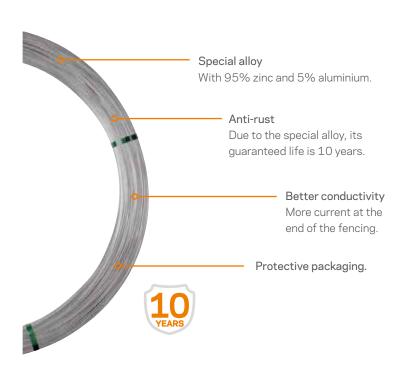
HIGH TENSILE

This aluminium-coated wire is many times better than any other steel wire. An aluminium coating on the 2.5mm thick core ensures superior conductivity of up to 15x more than a normal 2.5mm steel wire. The tensile strength of the wire is also particularly high at up to 500 kg. You can tension the wire very tightly and when used in combination with tension springs, you can work with a distance of 20m between posts. This produces considerable cost savings per metre.

ELECTROMAX 2.65MM

Particularly suitable for fencing that requires increased conductivity and control.

- 15% better conductivity than standard 2.5mm aluminium-coated wire
- Patented, advanced zinc-alu alloy coating produces superior corrosion resistance.

Special alloy
With 95% zinc and 5% aluminium.

Anti-rust
Due to the special alloy, its guaranteed life is 10 years.

Better conductivity
More current at the end of the fencing.

Protective packaging.

10 YEARS

High conductive fence wire 2,65mm

15% more conductive than standard 2,5mm high tensile wire. Carries power further and handles shorts better. Patented zinc-alu alloy outer surface for up to 3 times longer life than standard high tensile wire.

069385	ø2,65mm, ca 600m	= 1

H.T. zinc-alu wire

Steel cored, high tensile fence wire with an aluminium coating for longer life and greater conductivity. Permanent Wire Tensioner and Tension Springs can be used to strain the wire.

004195	ø1,6mm - ca.315m (5kg)	= 1
004188	ø1,6mm - ca.1580m (25kg)	= 1
039999	ø2,5mm - ca.625m (25kg)	= 1

M.T. fencing wire

Erecting a permanent fence becomes very simple with this aluminised fencing wire. Easier to bend than regular HT wire, but strong enough to keep sheep, cattle or game in/out. Very low resistance, which makes this wire ideal for long fence lines.

060412	ø1.8mm - ca.500m (10kg)	= 1

Stranded wire

High conductive 7 strand galvanized wire for long portable fences which are affected by growth. To be used with rabbit, fox, pig, and sheep fences.

008759	ø2mm - 200m (3kg)	= 1
007806	ø2mm - 400m (6kg)	= 1
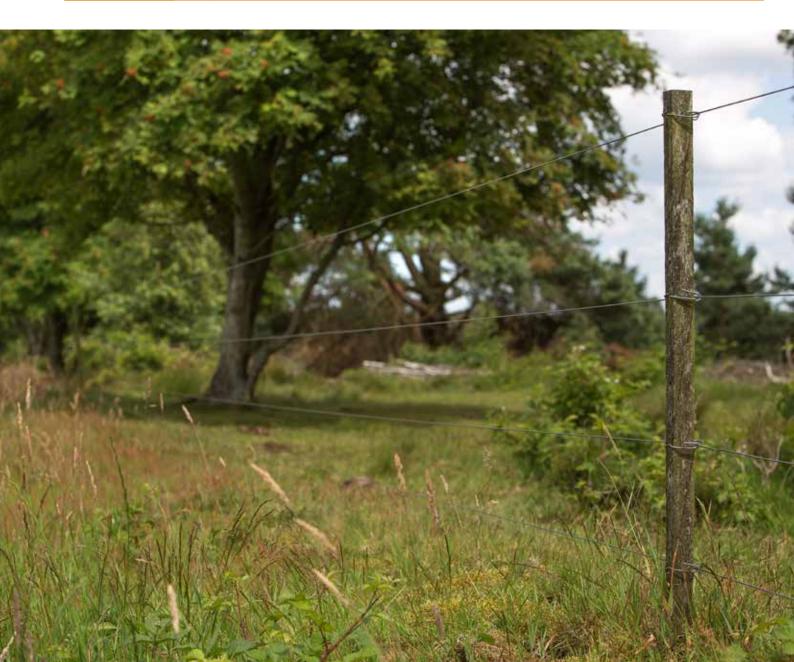
SPECIFICATIONS WIRE CONDUCTORS

	Item number	Colour	Metres on roll	Voltage at start of fencing	500 metres	1000 metres	Resistance (Ohm/metre)	Tensile strength (kg)	High tensile	Medium Tensile	Recommended Fencing length (m)	Special properties
"Aluminium-coated wire	004195 004188		315m 1580m	8kV	7,5kV	7kV	0,07	220	▪		500 >	zinc aluminium coating
1.6mm"	060412		500m	8kV	7,6kV	7,1kV	0,05	250		▪	500 >	zinc aluminium coating
"Aluminium-coated wire	039999		625m	8kV	7,8kV	7,5kV	0.035	500	▪		500 >	zinc aluminium coating
1.8mm"	069385		600m	8kV	7,9kV	7,8kV	0,029	550	▪		500 >	zinc aluminium coating
Permanent cable	009124 053858	White Terra	250m 250m	8kV	7,7kV	7,5kV	0,035	500	▪		< 500	2.5mm galvanised wire with non-conductive plastic casing and 3 conductive carbon cores.

GALLAGHER

CORD, PLASTIC WIRE AND TAPE

ECONOMYLINE AND POWERLINE

For fencing that is shorter than 500 metres. Available in Tape, Cord and Vidoflex 3 and 6. PowerLine conductors are made of durable top-quality plastic and stainless steel

EconomyLine   **Power**Line

TurboLine

TURBOLINE

For fencing that is longer than 500 metres. Available in Tape, Cord and Vidoflex 9. With a Turboline conductor you are certain you have the absolute top in conductors.

TAPE - PORTABLE AND PERMANENT FENCING

Tape has reinforced edges. You recognise PowerLine tape by the black side wire. These properties guarantee a longer lifespan for the product. The TurboLine version can be recognised by the red side wire and has a 40x better conductivity because of the light-metal wires that have been incorporated in the conductor.

TurboStar

Extremely strong, super conductive tape for long, permanent equine fencing. Perfectly visible. The sturdy, conductive side wire in the edges provides extra strength. Power guaranteed from beginning to end due to excellent conductivity. The unique composition ensures 40x better conductivity than standard 40mm tape.

PLASTIC WIRE VIDOFLEX -
PORTABLE FENCING

Vidoflex is ultralight and extremely durable. The 3, 6 and 9 next to the name Vidoflex note the number of current wires that have been incorporated for conductivity. The conductive wires of Vidoflex 9 TurboLine are made of a special alloy that is particularly conductive.

CORD, SOFT VERSION -
PORTABLE AND PERMANENT FENCING

Cord is a conductive plastic wire suitable for fencing for cattle and horses. Available in a PowerLine or TurboLine version.

PowerLine rope Eco

PowerLine Rope for semi permanent fences, suitable for horses and cattle. With 5 stainless steel wires for high conductivity. UV stabilised. Post spacing up to 8m.

PowerLine rope

Braided PowerLine Rope for (semi) permanent fences, suitable for horses and cattle. With 5 stainless steel wires and 1 mixed metal wire for high conductivity. UV stabilised. Post spacing up to 8m.

063918	White - 100m	= 1
063925	White - 200m	= 1
063932	White - 500m	= 1
063949	Terra - 200m	= 1

063956	White - 200m	= 1
063963	Terra - 200m	= 1
072453	White - 500m	= 1
072460	Terra - 500m	= 1

TurboLine rope

Braided TurboLine Cord prevents a lot of stretching and ensures a long life. By using 3 mixed metal wires in combination with 8 stainless steel wires an optimal conductivity is realised. Soft-touch cord provides high safety for your animals.

057856	White - 200m	= 1
056101	Terra - 200m	= 1

058006	White - 500m	= 1
057993	Terra - 500m	= 1

SPECIFICATIONS CORD

	Item number	Colour	Metres on roll	Voltage at start of fencing	500 metres	1000 metres	Resistance (Ohm/metre)	Tensile strength (kg)	Number of stainless steel conductors	Number of copper conductors	Recommended fencing length (m)
Economy Line Cord 5mm	063918 063925 063932 063949	White White White Terra	100m 200m 500m 200m	8kV	2kV	1kV	3,82	330	5		< 500
PowerLine Cord 5+mm	063956 072453 063963 072460	White White Terra Terra	200m 500m 200m 500m	8kV	4,5kV	2,5kV	0,18	330	5	1	< 500
TurboLine Cord 6+mm	057856 058006 069293 069798 056101 057993 069309 069804	White White White White Terra Terra Terra Terra	200m 500m 2x200m 2x500m 200m 500m 2x200m 2x500m	8kV	7,5kV	7kV	0,06	430	8	3	500 >

Blue Polywire - 400m

Blue polywire specially developed to keep wild animals out, in specific wild boars. Studies show that wild boars have poor eyesight and primarily see the color blue. Keep your crops safe by using this highly conductible wire.

NEW

075829	Blue Polywire - 400m	= 1
072477	Blue Polywire - 1000m	= 1

GALLAGHER

Vidoflex 9 TurboLine Plus

If you have or are looking for portable fencing that is longer than 500m, choose Vidoflex 9. Vidoflex 9 is 40x better than other plastic wire, 50% stronger, easy to see and it does not stretch.

011247	White - 200m	= 1
011254	White - 400m	= 1
054862	Terra - 400m	= 1
049028	White - 1000m	= 1
075775	Terra - 1000m	= 1

Vidoflex 3

Polywire with 6 Stainless Steel wires. Suitable for short portable fences. Available in 100m (brown) and 200m (white).

063987	Terra - 100m	= 1
019335	Green - 100m	= 1
010554	White - 200m	= 1

Vidoflex 6

Thick polywire with 6 stainless steel wires providing excellent conductivity. Ideal for portable fences. UV stabilised and high tensile strength for longer life.

021680	White - 200m	= 1
063970	Terra - 200m	= 1
021697	White - 400m	= 1
054855	Terra - 400m	= 1
072422	White - 1000m	= 1

SPECIFICATIONS VIDOFLEX

	Item number	Colour	Metres on roll	Voltage at start of fence	500 metres	1000 metres	Resistance (Ohm/metre)	"Tensile strength (kg)"	Number of stainless steel conductors	Number of copper conductors	Number of mixed metal conductors	Recommended fencing length (m)
PowerLine Vidoflex 3 2mm	010554 063987 019335	White Terra Green	200m 100m 100m	8kV	1,1kV	0,6kV	6,8	47	6			< 500
PowerLine Vidoflex 6 2.5mm	021680 021697 072422 063970 054855	White White White Terra Terra	200m 400m 1000m 200m 400m	8kV	2,3kV	1,4kV	3,8	80	6			< 500
TurboLine Vidoflex 9 3mm	011247 011254 049028 069316 069323 054862 075775	White White White White White Terra Terra	200m 400m 1000m 2x200m 2x400m 400m 1000m	8kV	7kV	6,4kV	0,06	105	6		3	500 >
TurboLine Blue Polywire 3mm	075829 072477	Blue Blue	400m 1000m	8kV	7kV	6,4kV	0,06	105		3		500 >

PowerLine tape 40mm - 200m

Highly visible tape with black reinforced edges. 11 thick stainless steel wires and 1 mixed metal wire for excellent conductivity.

006246	White - 200m	= 1
060696	Terra - 200m	= 1

PowerLine tape 20mm

Clearly visible PowerLine Tape with black reinforced edges. Ideal for semi-portable horse fencing. 5 thick stainless steel wires and 1 mixed metal wire for good conductivity. Post spacing up to 5m.

106236	White - 200m	= 1

PowerLine tape 12,5mm

Strong, 12.5mm PowerLine Tape with 4 thick stainless steel wires and 1 mixed metal wire for good conductivity. Suitable for portable fences for cattle, young stock and horses. Post spacing up to 5m.

062303	White - 100m	= 1
026237	White - 200m	= 1

TurboLine tape 40mm

Very strong TurboLine Tape with reinforced red edges, intended for permanent fencing for horses. 40 times better conductivity than standard 40mm PowerLine Tape. With 11 stainless steel wires 0,16mm and 4 mixed metal wires 0,25mm. Post spacing up to 6m.

007592	White - 200m	= 1

TurboLine tape 20 mm

Very strong TurboLine Tape with reinforced red edges, suitable for semi-permanent horse fencing. Blends in with the surroundings so it is not so conspicuous. 40 times more conductive than standard Powerline tape. Post spacing up to 6m. Always use TurboLine products if fence > 500m.

007608	White - 200m	= 1
060702	Terra - 200m	= 1

TurboLine tape 12,5mm

12,5mm TurboLine Tape. The horizontal wires are interconnected at 13 cm intervals ensuring better conductivity. 40 times more conductive than standard polytape. Ideal for portable electric fences. Post spacing up to 5m. 200m and 400m rolls. Always use TurboLine tape if fence > 500m.

076232	White - 200m	= 1
086231	White - 400m	= 1

TurboStar tape 40mm

TurboStar Tape is a premium 40mm tape which has the lowest resistance available today. It has 40 times better conduction than regular tape and will result in more power on your fence due to 10 stainless steel wires and 4 mixed metal wires. Post spacing up to 6m. The sturdy and breathable features prevent tensioning regularly. Available in white and tera on 100m rolls.

072439	White - 100m	= 1
072446	Terra - 100m	= 1
010608	White - 200m	= 1
010615	Terra - 200m	= 1
010516	Green - 200m	= 1

GALLAGHER

TurboStar tape 40mm white 350m

TurboStar Tape is a premium 40mm tape which has the lowest resistance available today. It has 40 times better conduction than regular tape and will result in more power on your fence due to 10 stainless steel wires and 4 mixed metal wires. Post spacing up to 6m. The sturdy and breathable features prevent tensioning regularly. Available in green, terra and white on 200m rolls and white and terra on 350m rolls.

COMPETITIVE METRE PRICE!
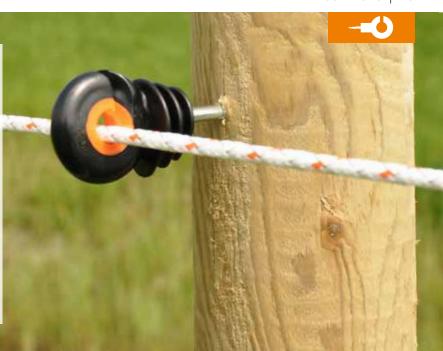
070862	White - 350m	✿ = 1
070879	Terra - 350m	✿ = 1

SPECIFICATIONS TAPE

	Item number	Colour	Metres on roll	Voltage at start of fence	500 metres	1000 metres	Resistance (Ohm/metre)	Tensile strength (kg)	Number of stainless steel conductors	Number of copper conductors	Number of mixed metal conductors	Reinforced side wire	Vertical linking	Recommended fencing length (m)
PowerLine Tape 12.5mm	062303 026237	White White	100m 200m	8kV	4,5kV	2,5kV	0,18	65	4	1				< 500
PowerLine Tape 20mm	106236	White	200m	8kV	4,5kV	2,5kV	0,18	175	5	1		▪		< 500
PowerLine Tape 40mm	006246 060696	White Terra	200m 200m	8kV	4,4kV	2,3kV	0,17	450	11		1	▪		< 500
TurboLine Tape 12.5mm	076232 086231	White White	200m 400m	8kV	6,4kV	5,3kV	0,09	100	3		2	▪	▪	500 >
TurboLine Tape 20mm	007608 060702	White Terra	200m 200m	8kV	6,4kV	5,3kV	0,09	200	3		2	▪	▪	500 >
TurboLine Tape 40mm standard	007592	White	200m	8kV	7,5kV	7kV	0,05	380	11		4	▪	▪	500 >
TurboStar Tape 40mm super	072439 010608 070862 072446 010615 070879 010516	White White White Terra Terra Terra Green	100m 200m 350m 100m 200m 350m 200m	8kV	7,5kV	7kV	0,04	520	10		4	▪	▪	500 >

INSULATORS

With our range of insulators we provide a solution for every type of fencing. Whether you use tape, cord, plastic wire, EquiFence or aluminium-coated wire, Gallagher has it all.
Our insulators stand out in terms of price, quality and durability.

XDI screw-in insulator

Improved screw-in insulator with unique advantages over traditional black screwing insulators. Much stronger due to the new technology.

025510	XDI screw-in insulator	= 25
065059	XDI screw-in insulator	= 75
025527	XDI screw-in insulator	= 125
060788	XDI screw-in insulator	= 250

XDI bolt-on insulator

High quality Bolt-on insulator with metal core. The orange ring guarantees an equal distance between the insulator and the conductor. Suitable for (poly) wire or cord on a steel post, like the Termination post (022014/022236). (External thread length 25mm M6 incl. 2xnut, total lenght 33mm).

| 057795 | XDI bolt-on - M6x23mm | = 10 |

Screw-in Insulator PROMOPACK (100)

With metal core. High-quality black plastic. For wooden posts. Suitable for (poly) wire and cord.

PROMO PACK EVEN MORE ECONOMICAL

| 071074 | Screw-in Insulator | = 100 |

GALLAGHER

Screw-in insulator

Low-priced, high quality screw-in insulator without metal core. Suitable for wooden posts.

060894	Screw-in insulator Economy	= 75

Wooden post "W" insulator

Made from high density, sunlight resistant polyethylene plastic. Large heavy duty shield eliminates power leakage. Suitable for guiding wire around a corner post.

006734	Black	= 25
028498	Black	= 175

Wooden post "W" super insulator

Made from high density, sunlight resistant polyethylene plastic. Large heavy duty shield eliminates power leakage. Suitable for guiding wire around a corner post.

067612	White	= 25
067617	White	= 175
067605	Black	= 25
021055	Black	= 175

Strain insulator reinforced

Suitable for short strains and semi-permanent short fences. Available in plastic and super strong polycarbonate.

011032	White	= 5
012022	White	= 100
678061	Black	= 100

Screw-in insulator

Solid High quality screw-in insulator without metal core, therefore no short circuiting possible. For adding a wire to a wooden fence post.

004089	Small	= 25
040711	Small	= 125
011193	Small	= 250
009008	Super	= 25
040728	Super	= 100
011209	Super	= 250

Strain insulator

Suitable for short strains and semi-permanent short fences. Available in plastic and super strong polycarbonate

011025	Black	= 5
012015	Black	= 100

Porcelain insulator

A porcelain End-strain Insulator for high tensions.

015139	White	= 6
053506	White	= 60
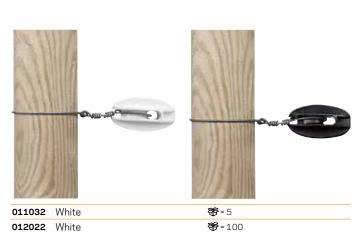
Porcelain insulator

A porcelain roll-corner insulator to strain the wires on the corner posts.

015146	White	= 6
015141	White	= 60
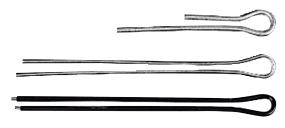
Clip

We recommend the use of Part.No 011056 for fixing wire to an Insultimber post or Gallagher Ecopost. Use Part.No 011063 with 1 metre droppers.You can tighten the clips using the wire twister (part.no 005232).

997025	Plastic coated	= 50
011056	Short	= 25
024698	Short	= 1000

011063	Long	= 50
024704	Long	= 1000

Roller screw-in insulator

Innovative Gallagher design. Easy to install. Suitable for poly wire and rope. The special design means the wire always returns to the roll.

029013	Roller screw-in insulator	= 5

Roller insulator

For use with Termination post (022014/022236) or for fixing to a wooden fence post. Only suitable for poly wire.

010707	Roller insulator	= 5

Roller bolt-on insulator

For use with Termination post (022014/022236). Only suitable for poly wire. External thread length 28mm. M8 incl. 2 x nut.

010714	Bolt-on - M8	= 5

PowerLine tape insulator

Insulator used to fix 40mm tape to wooden fence post. Can be stapled, nailed or screwed to post. The tape is very easy to fix.

011094	PowerLine tape insulator	= 25
040674	PowerLine tape insulator	= 125

TurboLine horse insulator

Insulator with soft faces to lock the tape between two rubber sleeves (patented system). Fixes the tape with 1 click and prevents wearing guaranteeing a long life for your tape. Additional screw can be used to tighten the insulator even more.

699004	TurboLine horse insulator	= 20
699066	TurboLine horse insulator	= 100

TurboLine horse corner/strain insulator

The new very innovative robust Corner Insulator. Has a lot of advantages compared to the traditional insulators. A unique sub frame for optimal strength and fixation at the post. Pre mounted rubber grip for best tape fixation. Can be installed with only one drill bit. A unique slot to strain and re-strain your tape. The optional metal plate (art. 708027) can be used as a tape connector and gate anchor.

701028	TurboLine corner/strain insulator	= 5
701042	TurboLine corner/strain insulator	= 30
708027	Plate for 701028/701042	= 5

GALLAGHER

TurboLine tape insulator

Insulator with soft faces to lock the tape between two rubber sleeves (patented system) to prevent the wear off guaranteeing a long life for your tape.

011087	TurboLine tape insulator	= 20
021482	TurboLine tape insulator	= 100

TurboLine corner/strain insulator

Corner insulator in high quality plastic which secures the tape between 2 rubber sleeves (patented system), guaranteeing long life for your tape. Use the connecting plate (Part No. 010745) for end (gate) posts to ensure good connection between the tapes.

016702	TurboLine corner/strain insulator	= 5
043880	TurboLine corner/strain insulator	= 30
010745	Tape joiner 20/40mm	= 5

XDI offset bolt-on insulator 20cm / M6

Innovative Gallagher design. Much stronger than the standard offset insulator due to a new technique, and more durable due to its metal core. The chance of short-circuits is zero. The orange plastic section serves as a wear indicator. (Total lenght 180mm, external thread length 125mm M6 incl. 2xnut/washer).

029006	XDI offset Bolt-on (M6) - 20cm	= 10

XDI offset screw-in insulator 10cm

NEW

Innovative design. Much stronger than the standard offset screw- in insulator thanks to a new technique. More durable thanks to its metal core. The chance of short-circuits is zero. The orange plastic section serves as a wear indicator. To be used with wooden posts. Distance 18cm.

075904	XDI offset screw-in insulator - 10cm	= 20

XDI offset screw-in insulator 18cm

Innovative design. Much stronger than the standard offset screw- in insulator thanks to a new technique. More durable thanks to its metal core. The chance of short-circuits is zero. The orange plastic section serves as a wear indicator. To be used with wooden posts. Distance 18cm.

028993	XDI - 18cm	= 10
042647	XDI - 18cm	= 100

XDI offset insulator 18cm

High quality offset insulator (18cm) with metal core, helps prevent damage to non-electric fences. The orange ring guarantees an equal distance between the insulator and the conductor. Suitable for (poly) wire or cord.

057801	XDI offset insulator - 18cm	= 10
057818	XDI offset insulator - 18cm	= 100

Offset insulator 10cm (20)

Solid high quality offset screw-in insulator (10cm) for wooden posts. Without metal core. Suitable for (poly) wire and cord.

072491	Offset insulator 10cm	= 20

Offset screw-in insulator 20cm

For electrifying non-electric fences quickly and effectively. Distance 20cm. With insulator suitable for wire and rope up to 9mm.

009350	Wood - 20cm	= 10

Offset bolt-on insulator 20cm / M6

For electrifying non-electric fences quickly and effectively. Distance 20cm. With insulator suitable for wire and rope up to 9mm. To be used with steel posts. (External thread length 110mm M6 incl. 2xnut).

007516	Bolt-on (M6) - 20cm	= 10

Pigtail offset

For electrifying specific existing non-live fences quickly. Available in 2 lengths: 17.5cm or 40cm. Very suitable for rope and tape. Pre-drill hole and staple the offset to the wooden post.

010981	White - 17.5cm	= 10
720234	Terra - 17.5cm	= 10
010998	White - 40cm	= 10
720135	Terra - 40cm	= 10

Live tip offset 16cm

With an electrified tip and zero leakage through the post, the live tip offsets are an effective, new option for protecting existing fences. 10 year product warranty.

006183	16cm	= 20
006190	26cm	= 20

Offset insulator

For protecting and electrifying chain link netting. The completely galvanized clips are easy to fit to any type of netting. Pin lock insulator makes fixing the wire easy. 32cm long.

010912	Chain link - 32cm	= 25

Offset Pinlock Insulator 30cm Black

For electrifying existing or run down fences. Easy to fix. 30cm long. Large spark guard. Pin lock for easy installation and removal of wires.

659046	Offset Pinlock Insulator	= 25

Mounting bracket

Mounting bracket. Fits on every garden wire enclosure. Incl. a connection point (M6 and M8) for insulator 010714/057795/007516 to also protect your garden wire enclosure. Fitted with a rubber insert to prevent damage to the post.

008780	Mounting bracket ø40-60mm	= 5

Clip

Easy to use stainless steel clips for adding an extra wire to the Gallagher Fibre glass post ø10mm.

018300	Clip fibreglass post ø10mm	= 25

Screw-on rod insulator (20)

For adding extra wire to round portable posts. Ideal for steel pigtail posts.

010950	Screw-on rod Black ø4-10mm	= 20
010936	Screw-on rod Green ø6-14mm	= 20
011230	Screw-on rod Green ø6-14mm	= 250
010943	Screw-on rod White ø6-16mm	= 10

Insulator for metal orange post

Adjustable insulator for Spring steel Post (art. 008902/019274).

010752	Insulator for 008902/019274	= 10
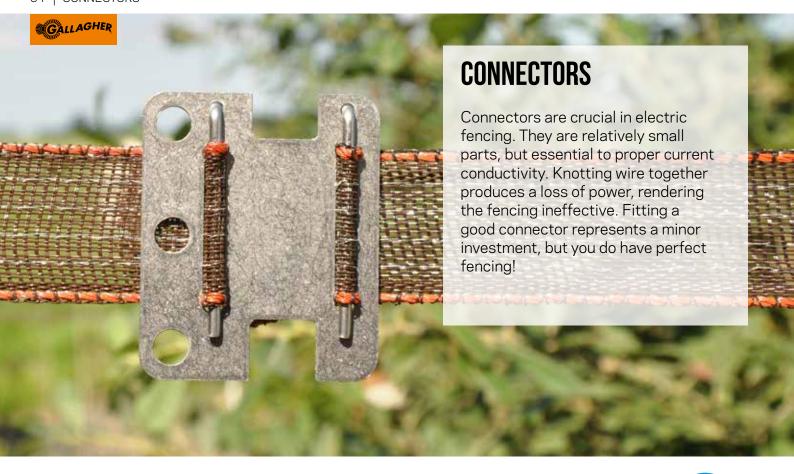
Clips stainless steel

Easy to use stainless steel clips for adding an extra wire to the Gallagher pvc post 13mm.

003266	Clips for PVC post 13mm	= 10
063499	Clips for PVC post 19mm	= 25

CONNECTORS

Connectors are crucial in electric fencing. They are relatively small parts, but essential to proper current conductivity. Knotting wire together produces a loss of power, rendering the fencing ineffective. Fitting a good connector represents a minor investment, but you do have perfect fencing!

Connectors

This stainless steel clamp provides a good conductive connection between polywire. Easy to use.

060764	Vidoflex connector	= 4

Cord connector with wingnut

NEW

This stainless steel clamp provides a good conductive connection between Rope or Vidoflex.

075928	Cord connector with wingnut	= 4

Connectors

This stainless steel clamp provides a good conductive connection between Rope or Vidoflex.

019342	Rope connector	= 4
071159	Rope connector	= 25

Joint clamp

Essential for ensuring there is no loss of conductivity at connections. Effective animal control is dependant on optimum conductivity around the power fence. Heavily galvanized for durability and long life. Suitable for all size wire and rope.

010851	Bobbin	= 10
603568	Bobbin	= 100

Joint clamp angle

Essential for ensuring there is no loss of conductivity at connections. Effective animal control is dependant on optimum conductivity around the power fence. Heavily galvanized for durability and long life. Suitable for all size wire and rope.

010868	Wing nut	= 10
603964	Wing nut	= 100
060498	Hex nut	= 100

Tape joiner

Innovative Gallagher design. For connecting and tensioning tape up to 20mm. Easy to install using the rucksack clasp principle. Now it is easy to connect tension and release tape.

| 028979 | Tape joiner 12,5/20mm | = 5 |
| 028962 | Tape joiner 20/40mm | = 5 |

Tape joiner

To be used in combination with part no. 016702 or for joining and/or connect 20/40mm tape. Gives excellent mechanical and electrical connection. Made from non-rusting stainless steel.

| 010745 | Tape joiner 20/40mm | = 5 |

Tape connectors

Double connector for connecting two rows of tape. Length cable: 60cm.

| 055333 | Tape connectors - 60cm | = 1 |

Tape energizer connector

Single connector for perfect connection from the energizer to the tape fence line. Length cable: 130cm.

| 055340 | Tape energizer connector - 130cm | = 1 |

End strain kit

Kit to easily tension Equiwire or High Tensile using a socket, fork spanner or a tensioner (695303). Eliminates the need for wire knots. May be used on all Gallagher wooden posts. Includes 2 tensioners.

| 618005 | End strain kit | = 2 |
| 695303 | Handle for tensioner 618005/056095 | = 1 |

Clip lock strainer

Clip lock strainers can be placed in the fence line during or after building your fence. For easy straining and re-straining your wires.

| 056095 | Clip lock strainer | = 2 |
| 695303 | Handle for tensioner 618005/056095 | = 1 |

Rope tensioner

For easy tensioning of rope. Easy release thumb catch. For use in combination with the roller screw-in insulator. (# 029013) or the strain insulator (# 011025/011032). Comes as standard with a roller screw-in insulator.

| 028955 | Rope tensioner | = 1 |

Tension spring

The tension spring neutralises the tension difference in the wire which is caused by fluctuations in temperature. It keeps the wire evenly tensioned during summer and winter, which means you can double (up to 15m) the distance between the posts. Suitable for 1.6mm and 1.8mm HT wire. Maximum tension strength 85kg. Stainless steel, lenght spring 155mm, Productwarranty 10 Year.

| 004133 | For H.T. ø1,6mm/1,8mm | = 1 |

GALLAGHER

Tension spring

The tension spring neutralises the tension difference in the wire which is caused by fluctuations in temperature. It keeps the wire evenly tensioned during summer and winter, which means you can double (up to 15m) the distance between the posts. Suitable for 2.5mm and 2.65mm HT wire and EquiFence. Maximum tension strength 200kg. Stainless steel, lenght spring 345mm, Productwarranty 10 Year.

036257	For HT/EQ ø2,5mm/2,65mm	= 1

Wire tensioner
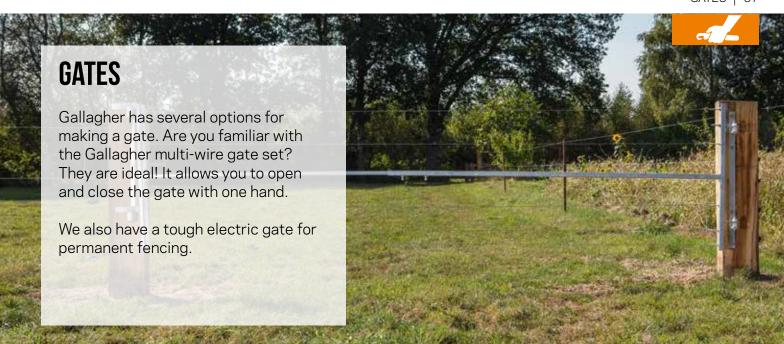
Use of this unique tensioner means that the wire does not have to be cut to strain it. Consequently, the power in the wire will be uninterrupted. Strong, lightweight, rust resistant construction. Can be used to join wires. Also suitable for rope. Excl. Wiretensioner (029044 or 006451).
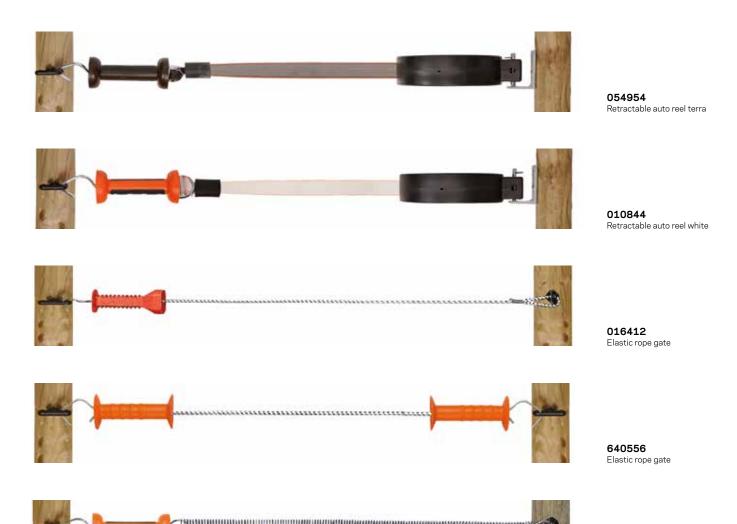
010882	Wire tensioner	= 3
021475	Wire tensioner	= 25

GATES

Gallagher has several options for making a gate. Are you familiar with the Gallagher multi-wire gate set? They are ideal! It allows you to open and close the gate with one hand.

We also have a tough electric gate for permanent fencing.

054954
Retractable auto reel terra

010844
Retractable auto reel white

016412
Elastic rope gate

640556
Elastic rope gate

009084
Spring gate

016405
Spring gate white

GALLAGHER

Multi strand gate kit
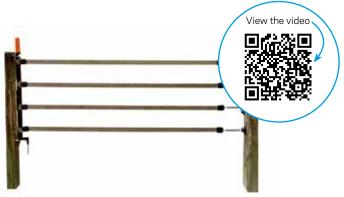
The most complete and easy to use all-in-one multi strain electric gate on the market. Provides a low cost gate solution for practically any width gateway. Comes with 40mm tape.

View the video

718842	4 x 40mm tape terra - 6m	= 1
718040	4 x 12,5mm tape white - 6m	= 1
718026	2 x 12,5mm tape white - 8m	= 1

Electrified steel gate

Adjustable, maintenance free gate, fully electrified. Suitable for all permanent fences incl. tape. Will fit gates from 2.5m to 4.5m. Height: 1.0m.

| 001064 | Gate - 2.5m-4.5m | = 1 |

Drive thru Electro gate

A complete gate which can be erected anywhere where you have to drive frequently through a gate. Vehicles can push the gate open and the spring loaded gate closes automatically.

| 004164 | Drive thru Electro gate 3.7m | = 1 |
| 054923 | Drive Thru Electrogate 5.0m | = 1 |

Elastic rope gate

Complete gate set (conductive cord, white), to quickly and easily create a passage in a (cord) fence. Easy to open and close by pick up the gate handle in or out of the included gate handle anchor. Suitable for gate passages starting from 3 up to 6 meters wide.

| 016412 | Rope gate set white | = 1 |
| 072354 | Rope gate set Terra | = 1 |

Elastic rope gate

Set to create a gate using elastic conductive rope (white). This rope with a length of 6½m can be stretched to create a gate of up to 11m. Fence can be opened from either end. Includes 2 gate handles attached to the elastic rope and 2 unique Gallagher gatehandle anchors.

| 640556 | Rope gate set | = 1 |

Spring gate

Adaptable, gate closure. Complete set, maximum width 5 m. Not recommended for use with horses.

009084	Spring gate	= 1
016405	Spring gate white	= 1

Retractable auto reel

Gate system with retractable reel, it automatically rolls and unrolls a walk way up to 15m. Simple to install and easy to handle. Comes complete with gate handle and multi directional mounting bracket. Available in white and terra.

010844	White - 15m	= 1
054954	Terra - 15m	= 1

Soft touch gate handle Rope/Wire

New strong gate handle in orange with black rubber accents for an optimal grip and excellent visibility. 697000 for cord or wire, 696003 with tape buckle 40mm.

697000	Orange - rope/wire	= 1
055722	Orange - rope/wire (4)	= 4
057979	Terra - rope/wire	= 1
058198	Terra - rope/wire (4)	= 4
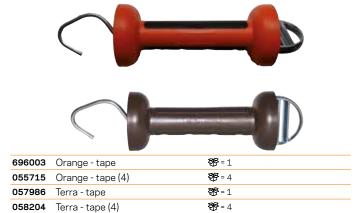
Soft touch gate handle Tape

New strong gate handle in orange with black rubber accents for an optimal grip and excellent visibility. 697000 for cord or wire, 696003 with tape buckle 40mm.

696003	Orange - tape	= 1
055715	Orange - tape (4)	= 4
057986	Terra - tape	= 1
058204	Terra - tape (4)	= 4

Heavy Duty gate handle

Heavy duty, durable gate handles in black and orange. Good visibility and large protective shields. 007585 has a compression hook for easy use. 010769 for attaching tape to a gate handle.

010776	Gate handle orange	1
010783	Gate handle black	= 1
007585	Black - N	= 1
010769	Gate break joiner	= 4

Compression gate handle Black

Gate handle with compression hook for easy use.

PROMO PACK EVEN MORE ECONOMICAL

072408	Black	= 10

GALLAGHER

Gate handle anchor

For connecting a gate handle, with galvanized joining plate. We recommend the use of wire clamp (part no. 010851) to guarantee an optimum connection.

| 010905 | Gate handle anchor | = 4 |

Gate handle anchor

Gate anchor with 3 anchor points for Gallagher gate handles, ideal in multi-paddock situations. Power connects to bolt from below the plate. Comes with the 3mm galvanized plate.

| 021451 | 3-way gate anchor | = 4 |

Gate handle anchor

Innovative Gallagher design. For attaching a gate handle. Stronger than all other gate handle anchors thanks to the new technique. Made of high-quality materials. Includes connector option for 1,6mm earth cable.

| 028986 | Gate handle anchor | = 5 |

Gate handle anchor

Innovative Gallagher design. Anchor to attach a gate handle to steel posts. Stronger than all other gate handle anchors thanks to the new technique. Made of high quality materials.

| 060658 | Bolt on - M6 | = 5 |

Gate handle anchor

For connecting a gate handle.

| 010738 | Gate handle anchor | = 4 |

REELS AND TOOLS

Reels are used for portable fencing to wind or unwind the fencing wire. It can be fixed with the reel corner post to produce a strong construction.

If you are going to put up electric fencing you simply need the right tools. Whether you need to tension High Tensile fencing, cut wire, or screw down insulators, the job is simple when you use Gallagher tools.

SPECIFICATIONS REELS

	Vidoflex 9 TurboLine Plus	Vidoflex 6	Vidoflex 3	Cord	TurboLine tape 40mm	TurboLine tape 20mm	TurboLine tape 12.5mm
Reel 500m 061139	400m	500m	500m	200m	100m	150m	200m
Reel 500m 061115	400m	500m	500m	200m	100m	150m	200m
Econo reel 046167	400m	400m	500m	150m	100m	100m	150m
Reel 400m 008919	250m	400m	400m				
Reel 200m 008933	150-200m	200m	200m				
Reel 1200m 016313	1000-1100m	1200m	1200m	400m	200m	200m	400m

Reel 200m

Low cost convenient plastic reel with ratchet for 200 metres of polywire.

008933	Reel 200m	= 1

Reel 400m

Convenient plastic reel with ratchet for 400 metres of polywire. Detachable drum.

008919	Reel 400m	= 1
009145	Spare drum for reel 400m	= 1

Econoreel 500m

A strong and durable reel with ratchet mechanism for winding up and unwinding polywire. Suitable for up to 500m polywire. Equipped with insulated handle. Hooks directly to fence or use Reel Stand.

046167	Econoreel 500m	= 1

Geared reel 500m

Equipped with an accelerator mechanism so the drum rotates three times faster than standard reels. Carry handle with knuckle guard. Locking ratchet. Long crank arm for better leverage. Wire loop for connecting power to wire/tape. Holds up to 500 metres of polywire or 250 metres of tape. Attachable to Reel Stand.

061139	Geared reel 500m	= 1
061115	Medium reel 500m	= 1

GALLAGHER

Large geared reel 1200m

Heavy duty gearbox for easy winding, fast wind in (2.7:1). Large comfortable hand grip with knuckle guard for safer use.
Holds: 400m 12.5mm TurboLine tape, 400m 12,5mm PowerLine tape, 1000m TurboLine rope or 1200m Vidoflex 6.

NEW

016313	Large geared reel 1200m	= 1
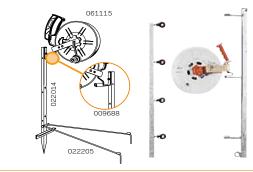
Reel/termination post

Reel/Termination post for portable fences. Holds up to three grazing reels or insulators. Galvanized steel Tread-in foot peg. Add the support bracket for additional structural support.

022014	3 reels/3 insulators - 1.25m	= 1
022236	4 reels/4 insulators - 1.85m	= 1
009688	Steel post reel connector	= 4
022205	Support bracket	= 1

Triple Geared Reel Stand pre-installed

Triple Geared Reel Stand with 400m TurboLine rope.
Pre-assembled with post and three pre-wound Geared Reels (061139).

Post height 1070mm and reels are pre-wound with 400m TurboLine rope.
Suitable for containing all types of animals

NEW

WITH 3:1 GEAR MECHANISM

633046	Incl. 3 Geared reel and TurboLine rope	= 1

Multi reel connector

Insulated lead for connecting power to multi reel system. UV resistant insulated plastic clips. Stainless steel jaws for long life.

006345	Multi reel connector	= 1

Wire dispenser

Ideal for running out or winding up all types of wire. Fully galvanized for long life. Easy to use.

011018	Wire dispenser	= 1

Gallagher pliers

Gallagher pliers: These pliers are suitable for all types of fencing wire. High quality and durable. Minimum wire damage. Cuts high tensile wire.

005225	Gallagher pliers	= 1

Wire twister

With this wire twister, you can twist the wire clips around a wire without a problem. Ideal for use with Insultimber/Ecopost fences.

005232	Wire twister	= 1

Farmer pliers

Farmer pliers: indispensable fence pliers for cutting wire or removing staples. Can also be used as a hammer.

004140	Farmer pliers	= 1

Post holer

Low cost and easy to use tool for installing soft wood posts. Using the postholer makes fencing easy and prevents the post from getting damaged when using a sledge hammer. Two diameters.

704644	ø7.5cm	= 1
704668	ø10cm	= 1

Drill chuck

Support to easy mount almost the entire range of Gallagher ring and screw insulators with your battery drill. (Not suitable for 057801, 057818, 009350 and Screw-in Insulator Super)

053933	Drill chuck	= 1

Rammer

Indispensable for driving Insultimber posts to correct depths without damaging posts. Prevents posts from standing out of line.

035311	Insultimber rammer	= 1
017652	Eco post rammer	= 1
017614	Sledge hammer	= 1

Wire tensioner

Tool for installing ratchet tensioners in fencing.

029044	Wire tensioner	= 1
006451	Wire tensioner handle super	= 1

Screws

Self drilling torx screws with cylinder head. The special red wax layer makes pre-drilling unnecessary. Screw bit included.

050000	Gallagher screws	= 200

NETTING

Gallagher has wide range of netting for ideal and reliable portable/moveable fencing. Whether you need netting for sheep, chickens, rabbits, cats, dogs or goats, we've got it.

We would also like to introduce you to our ideal fencing for sheep and cattle. The SmartFence 2.0 is our pride and joy - the perfect alternative to standard fencing netting.

NETTING KEY

We have a wide range of netting. Please use the key to find the right netting for you. It enables you to find the specifications of the netting.

For example:

Sheep netting, Orange 90/1 W 14/G

1. the type of netting
2. the colour of the netting
3. the height of the netting (cm)
4. 1= single pin
   2 = double pin
5. with a reinforced bottom wire
6. the number of posts
7. the colour of the posts:
   G=green / W=white /
   B=black

Sheep netting

Complete and user-friendly portable fencing netting for sheep and lambs. Also suitable as fencing near ditches so new-born lambs can stay in the pasture in complete safety. Length: 50m. Includes 14 posts with a single pin that are incorporated into the netting. Several nets are easy to connect together.

NEW

075379	Orange, 90/1 - 14/W	= 1
022175	Orange, 90/2 - 14/G	= 1
022106	Orange, 90/1 - 14/G	= 1
075768	Orange, 90/2 W 14/G	= 1
075386	Orange, 90/2 - 14/W	= 1

Poultry netting

Do you have chickens that need to be moved regularly? This chicken netting is the ideal solution. It is user-friendly, complete, and has a total length of 50m. The netting includes 15 posts with single pin that have been incorporated into the netting. Several nets are easy to connect together.

NEW

075867	Green, 112/1 W 15/B	= 1
022229	Orange, 112/1 - 15/G	= 1
022403	Orange, 112/2 - 15/G	= 1

Wild boar turbo netting

Turbo netting against wild boars. Strong posts 19mm, best solution to prevent wild boars destroying your crops. An electric fence in combination with a budget physical barrier.

| 062973 | White, 75/1 - 14/W | = 1 |

Combo netting

Combo netting: the netting with extra stability for use on rocky territory. Every 30cm the vertical wires are reinforced, resulting in a tighter net in rough terrain.

NEW

010356	Orange, 90/1 - 14/G	= 1
075584	Orange, 90/2 - 14/G	= 1
075546	Orange, 90/2 W 14/G	= 1
072415	Orange, 105/1 W 14/G	= 1
075539	Orange, 105/2 W 14/G	= 1

Turbo netting

Strong, high quality turbo netting. With a stranded cord, which reinforces the top wire by 80%, for greater conductivity. Because of the low resistance it is ideal to connect more turbo nets together.

| 010493 | White, 90/1 - 14/W | = 1 |
| 025473 | White, 90/2 - 14/W | = 1 |

Goat netting

Complete and easy to use portable netting for goats and lambs. If the pasture is bordered with ditches, netting offers even the newborn lambs maximum safety. Length: 50m.It is easy to connect nets together.

| 022168 | Orange, 105/1 - 14/G | = 1 |
| 022212 | Orange, 105/2 - 14/G | = 1 |

Repair Set Netting

Repair Set Netting

NEW

| 22104 | Repair Set Euro Netting | = 1 |
| 074747 | Repair Set Turbo Netting | = 1 |

Rabbit netting/Hobby netting

Complete and easy to use netting for rabbits or small pets. This netting keeps your small pets in the fenced plot. It also protects your garden, field or pasture. Length: 50m. Includes 15 posts with single or double spike mounted in the net. It is easy to connect nets together.

| 022182 | Orange, 65/1 - 15/G | = 1 |
| 024377 | Green, 65/1 - 15/B | = 1 |

SmartFence 2.0
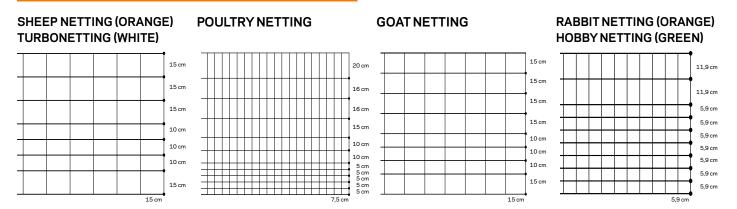
SmartFence 2.0 is the alternative product for netting. A revolution design where posts, reels and wires are combined into 1 product. Quick and easy to put up.

700007	SmartFence 2.0	= 1
700045	SmartFence 2.0 PK4	= 4
069750	PowerLine wire 3mm, 100m	= 1
069767	TurboLine wire 3mm, 100m	= 1
065264	Battery drill adapter	= 1
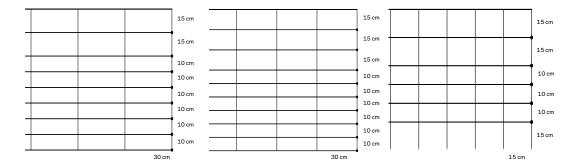
FENCING NETS - MESH WIDTHS

SHEEP NETTING (ORANGE)
TURBONETTING (WHITE)

15 cm
15 cm
15 cm
10 cm
10 cm
10 cm
15 cm

15 cm

POULTRY NETTING

20 cm
16 cm
16 cm
15 cm
10 cm
10 cm
5 cm
5 cm
5 cm
5 cm

7,5 cm

GOAT NETTING

15 cm
15 cm
15 cm
15 cm
10 cm
10 cm
15 cm

15 cm

RABBIT NETTING (ORANGE)
HOBBY NETTING (GREEN)

11,9 cm
11,9 cm
5,9 cm
5,9 cm
5,9 cm
5,9 cm
5,9 cm
5,9 cm

5,9 cm

COMBO NETTING - 90CM

15 cm
15 cm
10 cm
10 cm
10 cm
10 cm
10 cm
10 cm

30 cm

COMBO NETTING - 105CM

15 cm
15 cm
15 cm
10 cm
10 cm
10 cm
10 cm
10 cm
10 cm

30 cm

WILD BOAR NETTING

15 cm
15 cm
10 cm
10 cm
10 cm
15 cm

15 cm

SPECIFICATIONS NETTING

Part.no.	Application	Product description	Netting colour	Post colour	Pin	Height (cm)	Lenght (m)	Number of posts	Horizontal wires
022106		Sheep netting, Orange 90/1 - 14/G	Orange	Green	Single	90	50	14	8
022175		Sheep netting, Orange 90/2 - 14/G	Orange	Green	Double	90	50	14	8
075768		Sheep netting, Orange 90/2 W 14/G	Orange	Green	Double	90	50	14	8
075379		Sheep netting, Orange 90/1 - 14/W	Orange	White	Single	90	50	14	8
075386		Sheep netting, Orange 90/2 - 14/W	Orange	White	Double	90	50	14	8
022168		Goat netting, Orange 105/1 - 14/G	Orange	Green	Single	105	50	14	9
022212		Goat netting, Orange 105/2 - 14/G	Orange	Green	Double	105	50	14	9
022182		Rabbit-/hobby Netting, Orange 65/1 - 15/G	Orange	Green	Single	65	50	15	10
024377		Rabbit-/hobby Netting, Green 65/1 - 15/B	Green	Black	Single	65	50	15	10
022229		Poultry netting, Orange 112/1 - 15/G	Orange	Green	Single	112	50	15	12
075867		Poultry netting, Green 112/1 W 15/B	Green	Black	Single	112	50	15	12
022403		Poultry netting, Orange 112/2 - 15/G	Orange	Green	Double	112	50	15	12
062973		Wild boar netting, White 75/1 - 14/W	White	White	Single	75	50	14	6
010493		Turbo netting, White 90/1 - 14/W	White	White	Single	90	50	14	8
025473		Turbo netting, White 90/2 - 14/W	White	White	Double	90	50	14	8
010356		Combo netting, Orange 90/1 - 14/G	Orange	Green	Single	90	50	14	9
075584		Combo netting, Orange 90/2 - 14/G	Orange	Green	Double	90	50	14	9
075546		Combo netting, Orange 90/2 W 14/G	Orange	Green	Double	90	50	14	9
072415		Combo netting, Orange 105/1 W 14/G	Orange	Green	Single	105	50	14	10
075539		Combo netting, Orange 105/2 W 14/G	Orange	Green	Double	105	50	14	10

Part.no.	Application	Conducting wires	Weight (Kg)	Resistance Ohm/50m	Repair set included	Comment	Repairset (part.no.)	Post (part.no.)
022106		7	5,9	46	Yes		22104	22101
022175		7	6,65	46	Yes		22104	22105
075768		7	6,3	46	Yes	Reinforced not conducting bottomwire	22104	22105
075379		7	5,9	46	No		22104	22112
075386		7	6,65	46	No		22104	22113
022168		8	6,6	41	Yes		22104	22106
022212		8	7,35	41	Yes		22104	22107
022182		9	7,76	41	Yes		22104	22110
024377		9	7,76	41	Yes		22104	22111
022229		11	9,45	33	Yes		22104	22108
075867		11	9,45	33	Yes	Reinforced not conducting bottomwire	22104	22108
022403		11	10,26	33	Yes		22104	22109
062973		6	8,415	5	Yes		074747	NB.
010493		7	6,3	0,6	Yes		074747	22112
025473		7	7,05	0,6	Yes		074747	22113
010356		8	6,2	41	Yes	Vertical polyethylen struts	22104	22101
075584		8	6,2	41	Yes	Vertical polyethylen struts	22104	22105
075546		8	5,9	41	Yes	Reinforced not conducting bottomwire / Vertical polyethylen struts	22104	22105
072415		9	8	42	Yes	Reinforced not conducting bottomwire / Vertical polyethylen struts	22104	22106
075539		9	6,65	42	Yes	Reinforced not conducting bottomwire / Vertical polyethylen struts	22104	22107

KITS

Gallagher offers a wide range of kits - for pets, herons, horses or chickens!! Every kit includes an energizer and they are all easy to install.

Horse Kit B60 12V

The starters kit for horses and ponies has everything you need to set up a small paddock for you horse or divide existing ones. Installing is made easy due to the step by step manual. The kit includes: B60 (12V), PowerLine tape 12.5mm (200m), Vario posts 1m (10 pcs.), Screw-in insulator (25 pcs.), Soft touch gate handle, Warning sign, Earth peg, Gate handle anchor (5 pcs.).

| 072323 | Horse Kit B60 | = 1 |

Poultry Kit B60 12V

A complete kit for setting up 50 metres of electric netting 44" (112cm) to keep your poultry in and protect them against predators. Installing is made easy due to a step by step manual. The kit includes: B60 (12V), Poultry netting; double spike, 112cm (50m), Earth peg, Warning sign.

| 072309 | Poultry Kit B60 | = 1 |

Garden & Pond Kit M10 230V

A complete fencing kit to keep pets or small animals in or out. Installing is made easy due to the step by step manual. The kit includes: M10 (230V), Hobby post 0.75m (Terra, 10 pcs.), Vidoflex 3 (Green, 100m), Earth peg, Cable set universal, Warning sign.

| 072347 | Garden & Pond Kit M10 230V | = 1 |

Garden & Pond Kit B10 9V/12V

A complete fencing kit to keep pets or small animals in or out. Installing is made easy due to the step by step manual. The kit includes: B10 (6x 1,5V), Hobby post 0.75m (Terra, 10 pcs.), Vidoflex 3 (Green, 100m), Earth peg, Warning sign.

| 072330 | Garden & Pond Kit B10 | = 1 |

SnailFence Kit M10 (20mtr) 230V

Gallaghers "Out of the Box" solution:
to keep out the neighbour's Cat.
to keep Pine Martens out of the attic,
and of course to keep killer snails away from your vegetable garden.
Content: 1x Gallagher M10 Energizer, 1x 20 meter Snail Fence tape, 1x Junctionbox, 200x Screw M3x12, 10mtr Fence cable, 1x Mountingkit, 1x Manual.

NEW

075850	SnailFence Kit M10 (20mtr)	= 1

Heron kit

A basic system for a fence around your pond. Through this safe, highly effective fence system your pond is a prohibited area for herons, prevents them from eating fish from your pond. The system includes an energizer with wall clip, 10 border posts, 20 clips, 100 meters of black plastic wire and connecting wire. The material is suitable for a 2-wire fence with a total length of 50 meters.

021727	Heron kit	= 1
021789	100 m wire	= 1

Starter kit M10 230V

Kit includes M10 (220V), earthing plate, warning sign, connecting cable and wire clip. To keep in pets (e.g. dog) or deter small predators and other animals (e.g. stone martens, the neighbour's cat, herons, etc.). For gardens smaller than 20 x 60m.

065189	Starter kit M10 230V	= 1

ELECTRIC FENCING ON A WOODEN FENCE - HOW DOES THAT WORK?

An animal is given shock when it connects the + and – wires. The bottom wire (-) operates as the earthing. When a cat touches the fence with its paws, it will make contact with the earth wire (-). It then closes the circuit by touching the + wire with its head. This produces a shock effect, which makes the cat jump back into the garden.

4.000V IMPULSE TENSION

ELECTRIC FENCING FOR DOMESTIC ANIMALS IS HARMLESS!

An electric fence is based on the principle of a very short pulse being transferred over a wire. This pulse creates a current flow that is conducted over the skin instead of over the body. This ensures that only a shock reaction is created and no harm is done to the animal.

H-Trap (195x120cm)

Control horseflies without chemicals. Neither animals, such as horses or cattle, nor people enjoy horseflies. The H-trap reduces the horsefly population to an absolute minimum. Tests have demonstrated that a 90-95% reduction in horseflies can be achieved around an H-trap without using pesticides or electricity.

MT-Trap (40x50cm)

You need a horsefly trap to stop horseflies and wasps and this horsefly trap ensures that 95% of horseflies is captured. The MultiTrap, a portable horsefly trap, also known as the MT-trap, has been designed to eradicate horseflies and wasps.

NEW

034014	Horse fly trap		= 1

NEW

000441	Horse fly and Wasps trap		= 1

Foxlights

The way to protect your venerable animals against attacks from foxes and other night predators. 9 LED bulbs blink randomly so that the illusion is created for predators that someone is patrolling the area. 6 Volt battery is not included.

061716	Foxlights		= 1
002169	6V Battery for Foxlight		= 1

HOW DO I INSTALL MY FENCING?

For properly operating permanent fencing you are looking for durable materials that you can use for many years. It is equally important to make sure this permanent fencing is erected properly. We are pleased to explain the basic principles of how to build permanent fencing. For more comprehensive information, please visit www.gallagher.eu

1. Prepare a plan
2. Determine the correct wire height
3. Put up the corner posts
4. Put up the intermediate posts
5. Tension the fencing
6. Fit the energizer and earthing

PREPARE FOR THE GRAZING SEASON, DO THE GALLAGHER CHECK!
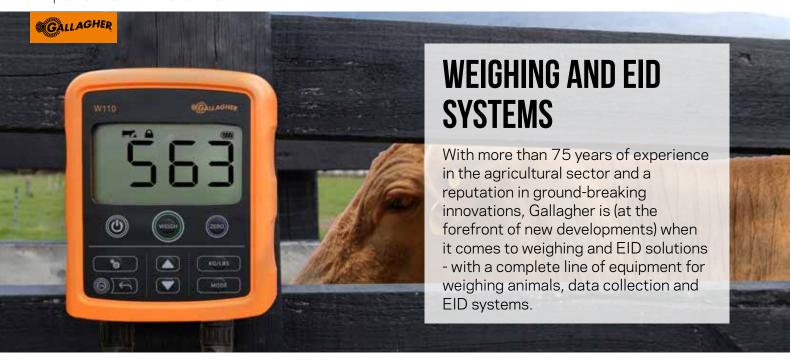
1. Check your electric fence energizer
2. Check the voltage on your fence
3. Check your fencing
4. Check your earthing

It goes without saying that all these steps are explained in detail in the Gallagher Check video. This is available at www.gallagher.eu or our YouTube channel.

> GO TO WWW.GALLAGHER.EU FOR EVEN MORE INSTALLATION ADVICE

WEIGHING AND EID SYSTEMS

With more than 75 years of experience in the agricultural sector and a reputation in ground-breaking innovations, Gallagher is (at the forefront of new developments) when it comes to weighing and EID solutions - with a complete line of equipment for weighing animals, data collection and EID systems.

Gallagher scales provide a modern, performance-aware cattle farmer with an innovative weighing system that are durable, reliable, accurate and extremely easy to use.

Digital weighing system, with serial port and Bluetooth compatible.

Quickweigh kit 600

Weigh scale W210

Can be used in combination with an aluminium platform.

Loadbars: 2000 kg 600 mm

Weigh scale W310

LOCKS WEIGHTS NEW 2.7x FASTER

NEW MODEL

Large and easy to read display.

Simple operation with large push buttons.

Internal, chargeable battery with an extremely long lifespan.

Quick, automatic, accurate weight records.

013053	Weigh scale W310	= 1		
054053	Quickweigh kit 600/W210	= 1	5.00	0.00

Weigh scale W110

3 weighing options.

Sturdy design, suitable for outdoor use.

NEW

Battery operated (4x AA batteries).

Plug and play system for easy use.

Compatible with loadbars up to 2000 kg, 1000 mm and load cell.

Gallagher's new entry model for weighing systems.

Digital weighing system, entry level model. For use with loadbars of 1,500 kg (580 mm), 2,000 kg (1,000 mm) and load cell. The scales can be used in three ways:

1. Static weights or products.
2. Manually weighing animals, taking account of any movements by the animal.
3. Automatically weighing animals (the weight is determined as soon as it is stable).

010205	Weigh scale W110	= 1

EID

Combination pack: HR5, W310v2 and dongle

The ultimate combination of Gallagher products for users who want to weigh animals individually and collect and analyse individual data with the EID system. Bluetooth connection could not be easier.

NEW

BLUETOOTH

072712	Combo package HR5+W310v2+dongle	= 1	2.50	5.00

An EID tag reader is an essential component of your EID system. The scanner reads the unique tag number of the individual animals and stores it during weighing, treatment or identification in the field or the shed.

Gallagher portable EID hand scanners are lightweight, durable and easy to use - perfect to take to different sites. Animal details can be scanned, recorded and collected in any part of the farm.

SmartReader HR5

Large, easy to read screen and complete keyboard.

LED, vibrations and **sound** to note a tag is being scanned.

ISO half and full duplex.

Market leader, ergonomic design with great range and hand guard for maximum safety of the operator.

Quick and continuous reading with one click on the switch.

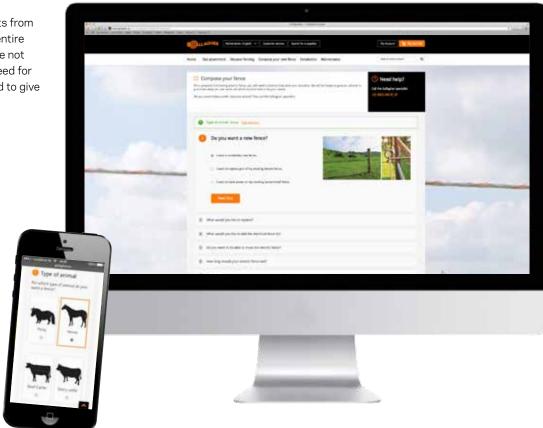| 033037	SmartReader HR5	= 1	4.17	5.00

GALLAGHER

WE KEEP YOU INFORMED ONLINE!

ORDER NOW ONLINE

It is easy to order your products from our website. You can find our entire range on the website. If you are not sure which components you need for your fencing we will be pleased to give you customised advice!

www.gallagher.eu

SUBSCRIBE TO OUR YOUTUBE CHANNEL

Discover how you can check your Gallagher fence or install an energizer. It also has all the information about our latest products. All in easy and short videos. Subscribe quickly and stay up to date!

www.youtube.com/gallagher

Your Gallagher dealer:

Important information! For all promo's available while stock lasts.

Colour and appearances may slightly differ to those of the actual items.

1133EXP © 2017